



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 33/487	A2	(11) International Publication Number: WO 98/38510 (43) International Publication Date: 3 September 1998 (03.09.98)
<p>(21) International Application Number: PCT/US98/04377</p> <p>(22) International Filing Date: 27 February 1998 (27.02.98)</p> <p>(30) Priority Data: 60/039,419 28 February 1997 (28.02.97) US</p> <p>(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 60/039,419 (CIP) Filed on 28 February 1997 (28.02.97)</p> <p>(71) Applicant (for all designated States except US): BURSTEIN LABORATORIES, INC. [US/US]; 33601 Avenida Calita, San Juan Capistrano, CA 92675 (US).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): VIRTANEN, Jorma [US/US]; 5005 Paseo Segovia, Irvine, CA 92612 (US).</p> <p>(74) Agent: HALLUIN, Albert, P.; Howrey & Simon, 1299 Pennsylvania Avenue, N.W., Box 34, Washington, DC 20004-2402 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: LABORATORY IN A DISK</p> <p>(57) Abstract</p> <p>An apparatus is described that includes an optical disk, adapted to be read by an optical reader, comprising a first sector having substantially self-contained assay means for localizing an analyte suspected of being in a sample to at least one, predetermined location in the first sector and a second sector containing control means for conducting the assay and analyte location information, with respect to one or more analytes suspected of being in a sample, accessible to the reader, wherein the presence or absence of the analyte at said location is determinable by the reader using the control means and the location information. Depending on the nature of the assay, the disk will include fluid storage means, fluid transfer means, such as one or more capillary ducts, valves, batteries, dialyzers, columns, filters, sources of electric fields, wires or other electrical conductive means such as metallic surface deposits and the like.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

LABORATORY IN A DISK

FIELD OF THE INVENTION

This invention relates generally to diagnostic assays and methodology therefor. In particular, it relates to diagnostic assay components configured on a compact
5 optical disk and methodology for the use thereof.

BACKGROUND

There is an enormous need to make clinical assays faster, cheaper and simpler to perform. Ideally patients should be able to test themselves, if so desired. One way towards this goal has been through miniaturization and integration of various assay
10 operations. Currently, a number of bio-chip assays (so-called because some are built using silicon chip photolithography techniques) are commercially available or under development. All of these approaches require a reading machine and a computer.

Disk-shaped cassettes used for clinical assays in conjunction with UV/Vis spectrometry are also commercially available. U.S. Patent No. 5,122,284 describes a
15 centrifugal rotor that contains a number of interconnected fluid chambers connected to a plurality of cuvettes. The rotor is adapted to be utilized with a conventional laboratory centrifuge, and is formed of materials that allow photometric detection of the results of assays that have been carried out in the reaction cuvettes. A large number of rotor configurations and related apparatus for the same or similar types of
20 analysis have been described. See for example U.S. Patents 5,472,603; 5,173,193; 5,061,381; 5,304,348; 5, 518,930; 5,457,053; 5,409,665; 5,160,702; 5,173,262; 5,409,665; 5,591,643; 5,186,844; 5,122,284; 5,242,606; and patents listed therein. Lyophilized reagents for use in such systems are described in U.S. Patent 5,413,732.

The principles of a centrifugal analyzer have been adapted into a disk that can
25 be used in a CD-drive like instrument (Mian, et al., WO 97/21090 Application). Mian

teaches a modified CD-drive with a dual function: 1. It is used to read information stored in the disk, and 2. It is used to rotate the disk. However, Mian does not teach utilization of the reading capability of a CD-drive for actual assay analysis.

Notwithstanding recent advances, there remains a need for a simpler assay configuration that performs assays quickly, efficiently, accurately and at low cost. The present invention combines diagnostic assays with computers and compact disk technology. In its most preferred embodiment, a computer with a compact disk reader is the only instrument needed. All chemistry is performed inside a compact disk that may be referred to as an integrated biocompact disk (IBCD). The same compact disk is also encoded with software, i.e., machine-readable instructional and control information, that provides instructions to a computer prior to, during and after the assay.

CDs or DVDs represent the most economical and in many ways best information storage media. It must be noted that CD and DVD are currently used acronyms that may change in the future even if the underlying technology stays basically the same. A CD- or DVD-drive is in several respects equivalent to a scanning confocal microscope. At the same time these instruments are comparable to good centrifuges, because in commercial drives the rotation frequency is between 200-12,000 rpm and can be adjusted within certain limits. Combining these three features into the same analytical system results into great simplification as compared with any other analytical technique. Yet, the performance is comparable or better than in most competing methods. Although this invention requires slightly modified CD- or DVD-drives, it is possible to incorporate these changes into commercial drives. This will enable Point-Of-Patient-Care (POPC) and home use of this invention. Use of CD- or DVD-drives will allow accurate digital analysis of any sample without any specific analytical instrumentation.

SUMMARY OF THE INVENTION

In one aspect, the invention is directed to an optical disk, adapted to be read by an optical reader, comprising a first sector having a substantially self-contained assay means for binding an analyte suspected of being in a sample to at least one
5 predetermined location in the first sector and optionally a second sector containing control means for conducting the assay and analyte location information, with respect to one or more analytes suspected of being in a sample, accessible to a reader, wherein the presence or absence of the analyte at said location is determinable by the reader using the control means and the location information. Depending on the nature of the
10 assay, the disk may include fluid storage means, fluid transfer means, such as one or more capillary ducts, valves, batteries, dialyzers, columns, filters, sources of electric fields, wires or other electrical conductive means such as metallic surface deposits and the like.

The disk may have one or more sample entry ports to deliver sample fluid to
15 the assay sector. Such ports if present are preferably sealable so that after application of the sample to the disk, the sealed disk including the sample comprises a hermetically sealed device that may be conveniently disposed of by conventional means or other disposal mechanisms for dealing with biological waste. Also, the assay sector of the disk is conveniently divided into various subsections for sample
20 preparation and analyte separation. A waste receptacle subsection may be conveniently provided as well. The assay sector may be divided into a multiplicity of subsectors that each receives a sample. Each such subsector may analyze for one or more analytes depending on the particular application at hand.

In another aspect the invention is directed to an apparatus for conducting an
25 assay comprising an optical disk, a disk reader and an information processor, the disk comprising a first sector having substantially self-contained assay means for localizing an analyte suspected of being in a sample to at least one, predetermined location in the

first sector and optionally a second sector containing control information for conducting the assay and analyte location information, with respect to one or more analytes suspected of being in the sample, accessible to the reader and processable by the information processor, wherein the disk is adapted to be read by the reader and the information processor is adapted to determine the presence or absence of the analyte at said location using the control information and the location information. The apparatus may include a reader having a CD-ROM or DVD reader and an information processor, such as a personal computer.

In still another aspect the invention is directed to an optical disk, adapted to be read by a CD-ROM or DVD reader, comprising a substantially self-contained assay means in the disk for localizing an analyte suspected of being in a sample to at least one, predetermined location on the disk and means at said location for detection of the absence or presence of the analyte by the CD-ROM or DVD reader.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic representation of a disk of this invention.

Figure 2 A is a more detailed schematic representation of a sample preparation and assay sector of the disk, illustrating the overall layout of a typical assay sector.

Figure 2 B is a schematic representation of an ubiquitous assay sector that is capable of performing immunoassays, DNA testing, cell counting, spectrophotometric assays and electrolyte analysis.

Figure 3 is a schematic representation of a disk of this invention illustrating a multiplicity of assay sectors, each having an individual sample inlet port.

Figure 4 is a more detailed schematic representation of one of the assay sectors illustrated in Fig. 3.

Figure 5 is a schematic representation of a chemically actuated battery useful in the present invention.

Figure 6 is a schematic representation of a structure to provide a dialysis function in the disk of this invention.

5 Figure 7 is a schematic representation of a column that may be included in the disk of this invention.

Figure 8 is a schematic representation of an electrically controlled valve useful in the present invention.

10 Figure 9 is a schematic representation of a reagent train configured in joined capillary ducts that is useful in the present invention.

Figure 10 is a schematic representation of an array of linear assay sites that are conveniently located in a flow channel in the assay sector of the disk of this invention.

15 Figure 11 A-C is a schematic representation of a variation of an assay element that is particularly useful for the detection of viral and bacterial particles and cells using the general methodology of site specific localization of the substance to be detected.

20 Figure 12 A-C is a schematic representation of a variation of the detection methodology in which opaque particles are utilized in the place of the reflective particles and bound to a reflective surface. Zig-zag lines represent oligonucleotides, but can be any recognition molecules, such antibodies. Particles are in this example plastic spheres, but can be liposomes, cells, etc.

Figure 13 is a schematic representation of an assay element of the invention illustrating the spacer molecule, with component sidearms and cleavage site, bound to a disk surface at one end and to a reporter element (gold or latex sphere) at its other end.

Figure 14 A is schematic representation of a first assay element of this invention, at an early stage during the assay procedure.

Figure 14 B is schematic representation of a second assay element of this invention, at an early stage during the assay procedure.

- 5 Figure 14 C is a schematic representation of the assay element in Figure 14 A wherein analyte molecules have bound the sidearms forming a connective loop between the sides of the cleavage site.

- Figure 14 D is a schematic representation of the assay element in Figure 14 B wherein analyte molecules have not bound to the sidearms and no connective loop has formed
10 between the sides of the cleavage site.

Figure 14 E is a schematic representation of the assay element in Figure 14 C after the spacer molecules have been cleaved. The reporter element remains attached to the disk surface at a discrete site.

- Figure 14 F is a schematic representation of the assay element in Figure 14 D after the
15 spacer molecules have been cleaved. The reporter element is detached from the disk surface and free to be washed away from its discrete site.

Figure 15 is a schematic representation of a cuvette assembly. Four cuvettes and their associated reagent and sample preparation chambers as well as light sources are shown in this example.

- 20 Figure 16 is a schematic representation of a capillary array that can be used to perform isoelectric focusing.

Figure 17 is a schematic representation of an apparatus for measuring exact volumes.

DETAILED DESCRIPTION OF THE INVENTION

A schematic overall representation of an integrated bio-compact disk (IBCD) is set forth in Fig. 1. The disk (Bio-Compact Disk, BCD) may be virtually of any shape and size. For most practical applications it is circular having a diameter of 10-1000 mm, most advantageously 20-200 mm and a thickness of 0.1-20 mm, most advantageously 0.5-3 mm. The disk 10 contains two sectors: an assay sector 11 and a software sector 12. A central hole 13 is provided for location in a compact disk reader. Software for controlling the assay may be on a separate disk. However, it is preferred to have the software on the disk associated with an assay for a particular analyte or analytes to minimize the opportunity for human error when performing the assay. The possible components and unit operations of the IBCD are presented in the following description.

The disk rotates typically up to 16,000 rpm in conventional CD-ROM or DVD readers. In all CD-ROM and DVD readers the speed is adjustable within certain limits (200-16,000 rpm). However, for some operations it may be advantageous to utilize rotations at differing speeds, for example 1000-10,000 rpm, and most preferably 2000-5000 rpm. For any particular assay, the controlling software dictates the rotation regimen during the analysis. This regimen, the speeds and timing, including times in which perhaps no rotation occurs to allow for incubation, electrophoresis, isoelectric focusing, etc., is controlled to deliver reagents and sample to appropriate sites on the assay sector as dictated by the assay protocols. Available rotational speeds do allow for a significant centrifugal force that may be used to move liquids. Another energy source that may be easily used in the IBCD is chemical energy. A most suitable form of chemical energy is released by a battery in the form of electrical energy. Mechanical and chemical energy allow the operation of many kinds of components. Important components of a IBCD may include one or more of the following: capillaries, containers, filters, dialysis membranes, chromatographic

columns, electrophoretic gels, valves, any micromechanical or electronic components including microprocessors, electrodes, especially enzyme electrodes, cuvettes, and assay elements. The possible unit operations carried out by the components include the following: centrifugation, filtering, transfer of liquids, mixing of liquids, dialysis, column separations, heating, cooling, electroconvection, electrophoresis, and analyte
5 detection and signaling thereof.

The IBCD is conveniently made from two pieces comprising upper and lower halves. The lower half may contain almost all the components, while the upper half may be a flat cover containing only a few components, such as electrodes and wires.

10 The number of layers in this invention may be more than two and many components may also be pre-made as modules. Especially reagent containers, cuvette assemblies, columns, micromechanical components, light sources, and microprocessors are advantageously assembled as modules. Various features may be printed onto the soft plastic. Various components may be glued, either by thermal or UV-curing, melted
15 together, connected by complementary mechanical features, mechanically clamped or simply enclosed inside a larger component. Some areas may be treated, for instance, with ammonia plasma to render these areas hydrophilic. The surface may be further treated by various molecules that render the surface inert or alternatively give it specific adsorption properties. Silylation is a general method for the treatment of
20 surfaces (Virtanen, J.A., Kinnunen, P.K.J. and Kulo, A., "Organosilanes and their hydrolytic polymers as surface treatment agents for use in chromatography and electronics," USP 4,756,971). Covalent attachment of detergents will reduce the adsorption of proteins, such as albumin, and will also reduce the adsorption of soluble proteins. Metal electrodes and wires may be evaporated onto desired areas. Masks or
25 resists may be used to localize the plasma treatment or metal deposition. Capillary ducts and fluid storage and retention compartments may be machined into the optical disks or formed by chemical means or in injection molding operations. As shown with reference to Fig. 2, the assay sector may contain a sample inlet port 14. The

sample port is preferably sealable so that at the disk is effectively sealed, except for necessary venting to allow for fluid flow, to protect from any biological hazards. By various means, e.g. centrifugal force and like means that are well known in the art, a portion of the sample is metered to a sample preparation site 15, that may contain
5 reagents and the like in order to conduct the assay. Alternatively, or in conjunction with reagents already in the sample preparation segment, a reagent train 16 may be provided to deliver, as needed, the necessary reagents in the proper order to the sample preparation segment. Additional details of the reagent train are shown in Fig. 9. It may be necessary to separate the analyte from the sample, at least partially, and
10 this may be done in a sample separation segment designated generally as 17. A battery 18 is provided if electrical energy is required for the separation process. Additional details of the battery are shown in Fig. 5 and described below. The resultant sample is then transferred to the assay site 19. In a preferred embodiment of the invention, the assay site contains an assay element as described in greater detail
15 below. The analyte binds to a predetermined location on the disk if it is present in the sample, and the presence of the analyte is detected by the reader from information that identifies the particular analyte with the location at which it is bound. A waste compartment is provided to collect overflow of reagents or sample that exceeds metered amounts for use in the assay and the various compartments and fluid transfer
20 channels are vented appropriately to allow for fluid flow throughout the surface of the assay sector.

In one embodiment of the invention, a multiplicity of assay sectors 21, 22, 23, etc. as shown in Fig. 3 may be provided, each sector connected to an individual sample inlet port 24, 25, 26 respectively. The operation of each sector is substantially
25 as described above although different assays may be conducted at the same time in individual sectors either for a multitude of analytes or a multitude of patients. The details of a particular sector are shown in greater detail in Fig. 4, where the various

possible components are identified by the same numbers as used in the foregoing description.

Components

As shown in Fig. 5, a battery may be provided that consists simply of two metal layers, such as copper and zinc, which are in the lower and upper half, respectively. During storage they are separated by air. When the disk is rotated, the space between these two metals is filled by dilute mineral acid, depending on the nature of the metal electrodes. In the case of copper and zinc, this may be dilute sulfuric acid, containing copper ions and the battery is activated. This battery generates a voltage of 1.5 V for only about 1 hour. However, this is more than enough to complete the analysis. Longer lasting batteries may be made, if necessary, from other materials or thicker metal layers. Importantly, allowing water to flow into the space between the metal layers deactivates the battery. The activation and deactivation cycle may be repeated several times. Several batteries may be coupled in series to increase the potential, if necessary. Optionally, photodiodes may be included into the circuitry. In this case, the computer controlling the assay is provided with information about the active circuits. Also, a miniaturized, pre-fabricated battery may be utilized and activated by closing the electrical circuit with a salt, e.g. sodium chloride, solution.

Capillaries preferably are used to transfer liquid and air. Also, very small volumes of liquid may be stored in capillaries. Preferably, air capillaries are hydrophobic, while capillaries that come into contact with water are hydrophilic. As necessary, capillaries may have circular or rectangular cross-sections. Typical depths are between 10 μm and 500 μm , while widths are between 50 μm and 2 mm. Air capillaries utilize the larger dimensions to prevent any formation of a pressure gradient, unless otherwise desired. The velocity of the flow depends on the frequency

of the rotation of the IBCD, the dimensions of the capillary and the viscosity and density of the liquid. Physical properties of the liquid are dictated by the assay and the frequency of rotation is limited to a certain extent by the CD-ROM or DVD reader. Thus, the dimensions of the capillary are used to adjust the speed of the liquid transfer. The capillary ducting may be provided with "bottlenecks," i.e., restrictions in the cross-sectional areas of the capillary, to control the velocity of the liquid as necessary. Hydrophilicity and hydrophobicity may be used for the same purpose.

The exact dimensions of the capillary network and chambers may be designed by using the Navier-Stokes equation:

$$\rho \mathbf{v} = \rho \mathbf{b} - \nabla p + \mu \nabla^2 \mathbf{v}$$

where ρ is the density, p is the pressure, \mathbf{v} is the velocity, \mathbf{b} is the body force field, μ is the viscosity and ∇ is the differential operator *del* (Mase, Continuum Mechanics, McGraw-Hill, 1970). Pressure is a scalar field, while \mathbf{v} and \mathbf{b} are vector fields. Commercial computer software for solving of the Navier-Stokes equation in complicated geometries is available.

Containers or compartments formed in the disk are used for sample input, to store reagents, to perform reactions and to collect waste. Their depth is about 1-2000 μm , preferably about 10-800 μm and they may have any shape possible, although circular or rectangular cross-sections are preferred. Compartments are hydrophilic, except for one end of the waste container which has an air capillary that is hydrophobic. Reaction compartments may be formed with electrodes for heating, electroconvection of electrochemical purposes. Electrodes are preferably evaporated gold films. Compartments may also have valves that are operated by electricity or chemically as described below. Storage containers may be metal coated, preferably gold coated, to prevent the penetration of the water into the plastic. Reagents may also be prepacked into cassettes, which are virtually impermeable. These cassettes

may be closed during storage and opened manually, by puncturing or by opening a valve or plug when the sample cassette is place in the disk. Opening of the cassette may also be facilitated by centrifugal force when the IBCD starts to rotate. In any case, proper liquid flow is maintained during the assay by computer control *via* CD or
5 DVD-reader.

The liquid flow during the assay may be monitored by using a reflective element. The reflective element utilizes the laser that is in the CD or DVD-reader and the fact that even when the liquid is transparent its reflective index is significantly different from that of air. Thus the laser light is reflected back to the CD or DVD-
10 reader in the presence of air and in some other direction in the presence of liquid, or *vice versa*. Another method of monitoring the liquid flow is to use an active light source, such as an LED or semiconductor laser. Such a light may be powered by the presence of an electrically conductive liquid, such as plasma or buffer, acting to close an electronic circuit.

15 A LC-display may be used to transmit information from the IBCD to the CD or DVD-drive and to the computer. LC-display may have a large number of pixels that reflect light when there is a potential over the LC-film. These pixels may be, for instance, linearly organized, so that in one end low potential is needed for the reflection of the light, while on the other end the potential must be much higher for
20 the same result. A CD or DVD-drive is able to localize the reflective pixels and accordingly, the potential in the circuit can be measured. Potential change can be due to an electrochemical process in one of the electrochemical cells. For example, an electrode coated with cholesterol oxidase will generate hydrogen peroxide in the presence of cholesterol. Hydrogen peroxide will change the potential of the circuitry
25 and cholesterol may be quantitated.

Filters may be used to remove large particles, such as cells, dust, etc. from the soluble sample. Accordingly, filters are most preferably included as part of the

sample inlet compartment. Filters may be formed from porous plastic, glass, cross-linked cotton or cellulose, etc. These materials may be in the shape of rods or similar shapes depending on the particular use to which they are being put. Plastics, such as Teflon, may be used as films.

5 Since chaotropic agents are often used to denature oligonucleotides during sample preparation, it is advantageous to provide a means of dialysis in the disk to remove the salt prior to the assay being performed. As shown in Fig. 6, a dialysis unit is prepared by putting a dialysis membrane 27 on either one or both halves (top and bottom) of a compartment formed in the disk 10. Taking into account the small
10 volumes, the buffer that is already inside the dialysis membrane is usually sufficient and typically no buffer is needed on the side of the membrane opposite the fluid layer.

 A column may be prepared, such as shown in Fig. 7, by filling a compartment 28 with a desired gel, adsorbent or ion exchanger, e.g. silica gel, Sephadex, etc. (the particular material is chosen for the particular application for which it is used) and
15 putting a filter 29 in the other end. Examples of potential uses, include separating smaller molecules from larger ones and fractionating hydrophilic and hydrophobic compounds. An ion exchange column is especially useful for the separation of nucleic acids from other biomolecules. The columns lend themselves to other uses that may be convenient or necessary for conducting any particular assay.

20 Fig. 8 illustrates a valve, designated generally as 30, that may be located in one end of a column or a reaction container, which has two outlet capillaries 31 and 32. In addition, there are two electrodes, 33 and 34, which are not charged initially at the position illustrated and a conductive, metallic foil 35 that is adapted to close one or the other of the capillaries depending on its position relative to each capillary. The
25 metal foil is biased to close one of the capillaries when no current is flowing and operates to open the previously closed capillary and close the other capillary when current flows. As an example, the valve is made from a thin gold foil, which is

mechanically pressed against the other outlet capillary and is electrically connected to the closest electrode. When the battery is activated the gold foil is repelled by the closest electrode and attracted by the other electrode. As a result the gold foil is pressed against the other outlet. Other conductive metallic foils may be used, but a
5 metal that is conductive and non-corroding is preferred for most operations. The battery may be deactivated as explained earlier and the valve is then switched back to its original position.

The laser of CD-R or CD-RW-drives has power up to 10 mW that can heat objects to high temperatures, even to 600°C. The power is strong enough to puncture
10 holes in several materials, including plastics. Plastic should contain a dye that absorbs the laser light. Thermal expansion may be used for reversible valving. For instance, the bending of bimetallic foils is extremely sensitive to the temperature.

Piezoelectric material may be used as a valve. Piezoelectricity may also be used for measuring extremely small volumes of liquids, for example nanoliters of the
15 sample can be divided between different assays.

Valve-like operations may also be performed chemically by deposition from solution of a solid chemical compound and/or dissolution of a deposited, solid compound. The first outlet of such a valve is closed by deposition of a chemical compound inside the capillary. The compound may be, for example, silver chloride.
20 The chloride ions may be in the main fluid stream while in separate side capillaries are pure water and silver nitrate in water. The side capillaries are configured such that first the water and then the silver nitrate are added to the main fluid stream containing the chloride. The moment the silver ions arrive at the intersection it is clogged, effectively acting as a closed valve. Alternatively, a capillary may be initially clogged
25 by the solid form of a soluble compound, such as sodium chloride. Addition of any aqueous solution dissolves the sodium chloride clog and the capillary is opened.

The assay element is preferably utilized in the assay site of the present invention. Briefly, the assay element (Fig. 13) includes a cleavable spacer 61 covalently attached at one end 60 to the disk surface 59 and at the other end 62 to a reporter element 65. The preferred embodiments of the reporter element described
5 herein include reflective gold spheres or opaque latex spheres. Also included are two recognition elements 63a, 63b, hereafter referred to as sidearms which are covalently attached to each spacer such that the one sidearm is connected to each side of the spacer's cleavage site 64. The preferred embodiments of the sidearms described herein include oligonucleotides, antibodies and oligonucleotide-antibody conjugates.

10 The assay elements may be used to detect the presence of an analyte and create a signal thereof through either a positive or negative recognition event (Fig. 14). A positive recognition event (Fig. 14A, C and E) occurs when an analyte 66 binds to both sidearms 63a, 63b resulting in the completion of a connective loop 67 between the two sides the spacer bisected by the cleavage site 64. A negative recognition event
15 (Fig. 14B, D and F) occurs when analyte 66 binds to only one or neither of the sidearms 68a, 68b and consequently no loop is made connecting the two sides of the spacer. When a positive recognition event is followed by cleavage of the spacers, an unbroken connection from disk to reporter element remains intact (Fig. 14E). On the other hand, cleavage of the spacers in an assay element following a negative
20 recognition event results in the reporter elements being disconnected from the disk (Fig. 14F). Thus, negative recognition results in loose reporter elements that are easily washed away whereas positive recognition results in the reporter elements being retained in their discrete assay sectors. In either case, the results may be observed immediately by CD-ROM or DVD reader.

25 Further embodiments of the invention are described herein that utilize both reflective or opaque reporter molecules, and positive and/or negative recognition events to carry out a broad range of possible assays. For example, in some assays the sidearms may be connected before a sample is added and binding of the analyte acts to

disconnect the sidearms. In this case, a positive recognition event results in the disappearance of the reporter element, while a negative recognition event results in the reporter element being retained.

Other possible embodiments of the assay element described herein do not include cleavable spacers with sidearms. In one such alternative scheme the surface of the IBCD is coated by metal, preferably by gold, and the analyte connects the opaque particles, such as latex beads, or dye loaded liposomes on the metal surface.

Opaque Spheres as Assay Elements

Previous assay elements are based on the binding of reflective particles to the transparent surface of the IBCD. The situation may be reversed so that opaque particles are bound to a reflective surface. This approach is especially advantageous when large cells are assayed and is illustrated generally in Fig. 12.

A metal film is deposited onto the plastic surface. Information may be coded into this metal layer as it is done in conventional CDs. This information may include spatial addresses or other information related to the assay. The metal layer is further covered by a plastic layer. This is then aminated, as described previously, and instead of gold spheres, large latex spheres 58 (10-50 μm diameter), which contain a dye, are attached to the substrate via spacer molecules as previously described. These latex spheres are partially coated with recognition molecules as described above for gold spheres. Cell recognition binds the latex spheres to the substrate even after the spacers are cleaved, and the dye in the spheres prevents the reflection of the laser light from the metal layer. Alternatively, if a proper fluorescent dye and wavelength of laser light are used, the fluorescent emission of the spheres may be used to monitor the assay. This requires a specialized instrument and will be facilitated by blue lasers when they become available for use in CD-ROM or DVD-readers.

In the simplest version of the cell detection assay, the latex spheres are not connected with the IBCD before the assay, but are added after the cells are bound to the IBCD. The latex sphere suspension is added, the recognition molecules on the spheres bind to the proper cells and these cells are immobilized. These latex spheres
5 may then be observed by reduced reflectance using the CD-ROM or DVD-reader.

Complementary Binding of Spacers

One drawback of the covalent binding of spacers is that the disk is not easily regenerated after the spacers are cleaved. If the spacers are instead connected to the substrate with complementary oligonucleotides, the disk can be regenerated after an
10 assay is completed. The spacers or their residues are removed by heating or by using chaotropic agents. The duplexes that bind spacers are denatured and the disk can be cleaned. The disk retains the oligonucleotides that were binding old spacers. All oligonucleotides on one assay site are identical. They may be different in different assay sites, or they may be identical on the whole IBCD. New spacers having
15 oligonucleotides complementary to those on the IBCD are added. After incubation the complementary oligonucleotides of the spacer and the IBCD hybridize. The excess spacers are washed away. In this case the oligonucleotide sidearms may be attached to the spacers before the spacers are attached to the surface. Gold spheres are then added, they are bound by the thiol groups or disulfide bridges of the spacers, and
20 the disk is ready to be used again.

A cuvette is used for UV/Vis spectrophotometric, fluorescence or chemiluminescence assays. A cuvette in the BCD is basically a capillary that is located between a light source and a photodetector. Light can be guided by mirrors and waveguides. The number of cuvettes in the BCD varies between 0-10,000 and most
25 advantageously between 0-50 per assay sector. The sample arrives into the most cuvettes *via* a sample preparation chamber. These chambers may contain preloaded

reagents or reagents are stored in separate chambers and are mixed with the sample while it arrives into the sample preparation chamber. Sample and reagents may be heated electrically by infrared radiation that is generated by a photodiode. After the incubation period the sample is transferred into the cuvette. The transmitted or
5 emitted light is measured by a photodetector. In this invention the photodetector is most advantageously inside the CD or DVD drive.

Light sources for spectrophotometric assays are most advantageously photodiodes or semiconductor lasers. It is possible to use the light source of the CD or DVD drive. However, currently these instruments use only one wavelength that
10 corresponds to infrared or red light. If an internal light source of the CD or DVD drive is used, the photodiode or laser in Fig. 15 is replaced by a mirror. Although several assays can be performed by using infrared or red light, it is advantageous for most applications to use additional light sources. For example, an array of photodiodes can be fabricated so that red, yellow, green and blue light can be
15 generated. It is possible to design a photodiode for any given wavelength and accordingly, the number of photodiodes can be up to 300 to cover the whole UV/visible spectral range. Laser generate more power and are better focused than photodiodes and they are preferred. Especially microcavity and nanodot lasers are very small, and they can be fabricated to emit almost any wavelength. The light
20 sources can be fabricated as a module that can be attached onto the disk before and removed after the use of the BCD.

Unit Operations

Next are described the unit operations: centrifugation, filtering, transfer of liquids, mixing of liquids, dialysis, column separations, heating, cooling, electro-
25 convection and electrophoresis.

Centrifugal force is the main force used to transfer liquids in the IBCD. It may also be used for centrifugation, which is important when cells are separated from plasma. In this case, it is advantageous to include a filter with the sample intake container.

5 In the transfer of liquids, order and timing are important. In order to insure the proper sequence of arrival to a certain reaction site, liquid trains, such as illustrated in Fig. 9, may be created. In one embodiment, two main capillaries, 36 and 37, are provided that are in fluid communication with each other via connecting capillaries 38, 39 and 40. One of the main capillaries is an air channel to allow for fluid flow and typically is rendered hydrophobic. The other main channel carries the reagents in liquid form and typically is hydrophilic. The connecting capillaries and associated cavities may serve to store the reagents, generally designated 41, 42 and 43, and maintain their relative locations with respect to each other. The fluid compartment to which they are directed and their timing of delivery is controlled by their respective locations, the size of the capillaries, the density and viscosity of the fluids and the rotational speed of the disk. The liquids are separated by small air bubbles to prevent mixing, unless mixing is desired. To prevent pressure gradients air capillaries are connected upstream with all liquid capillaries. To further prevent the liquids from entering the air capillaries, these are hydrophobic.

20 Mixing of two solutions is performed by merging two capillaries in a Y-shaped formation. This alone provides good mixing. To guarantee more efficient mixing a capillary may have small periodic enlargements after the merge. It must be noted that rotation of the IBCD results in efficient mixing in the containers.

In dialysis the liquid is in contact with the membrane containing the buffer.

25 The molecular weight cutoff of the membrane may be chosen to be between 300-500,000 Dalton. Because only a very thin layer of the liquid is in contact with the dialysis membrane, the dialysis is very fast. However, the ratio of the liquid to buffer

is only between 1:10 and 1:100 so that the dialysis is not quantitative. For most purposes it is sufficient.

Gel, adsorption and ion exchange chromatographies are all possible. The various molecular species are fractionated by the chromatographic media and exit the capillary separately as in conventional chromatography. Using a valve, certain fractions may be selected and guided into an assay element.

Heating is best done electrically. Upper and lower electrodes are separated by about 500 μm . If the solution contains ions, the system is virtually short circuited and heats up. Heating may be terminated by removing ions either from the battery or from the container. Constant temperature can be achieved by including a thermostat into the circuitry. A bimetallic element is a very simple thermostat that can close a circuit below a preset temperature and open it at higher temperature. Another heating mechanism is provided by the laser of the CD or DVD-drive. Especially, CD-R-drives have powerful lasers. Either the top or the bottom of the cavity can have a liquid crystalline film that is isolated by a transparent layer, if necessary. On the other side of the cavity is a reflective layer. When the temperature of the cavity is below the main transition temperature the liquid crystal will scatter the light and no reflection is observed. Above the main transition temperature the light is reflected back and the heating can be discontinued and it is less effective anyway. Cooling is preferably provided by endothermic dissolution, i.e., the absorption of heat by the presence of a dissolving substance. The cooling solution and the solution to be cooled should be separated by a thin aluminum, copper, silver or gold film. Cooling may also be produced by passive air cooling. This method cools only to ambient temperature, but for most purposes this is enough. Cooling and heating may also be alternated in a cyclical fashion, either in one cavity or in a serially alternating sequence of heating and cooling cavities. This allows PCR amplifications to be performed inside the IBCD.

Electroconvection, electrophoresis and isoelectric focusing may each be utilized in particular applications. In electroconvection the material is transferred without trying to separate it into components. In electrophoresis the separation is the main purpose. The separation is facilitated by the use of a gel that prevents
5 convection. Because distances are very short, the available field strength is sufficient for proper electrophoresis. For the same reason the necessary time for separation is fairly short and may be on the order of 1-5 minutes, or even less than 1 minute. Useful electroconvection may be performed in few seconds. Isoelectric focusing is basically electrophoresis in a pH gradient. A pH gradient may be created by an array
10 of parallel capillaries, each of which contains a different buffer so that the pH changes gradually. This is demonstrated in Fig. 16. A large part of the buffer will remain in the capillaries and this will guarantee the existence of the pH gradient during the isoelectric focusing. After the focusing is completed the components can be moved along the capillaries by centrifugal force or an orthogonal electrophoresis can be
15 performed. This method allows almost complete fractionation of human plasma proteins (Anderson, Tracy and Anderson, "The Plasma Proteins," 2nd Ed., Vol. 4, Academic Press, Inc., 1984).

A particularly advantageous configuration of an assay site is illustrated in Fig. 10. The assay element contains the spacer molecules and the reflective spheres as
20 described previously but does so in a linear array that may be conveniently located in one or more of the capillary channels at the assay site of the disk. As has been described, analyte binds to the spacer molecules that have side arms receptive to or complementary to the analyte (as illustrated in A) and after washing the analyte that has bound is located at specific locations of the array (as illustrated in B). The
25 presence of the bound analytes is determined by conventional address determination as with conventional compact disk readers and associated software as has been described.

EXAMPLE 1Assay Sector for Oligonucleotide Analysis (Fig. 2, Assay Sector)

A sample that contains DNA is mixed with sodium dodecyl sulfate to lyse the cells. This solution is transferred into the container denoted "Sample in" and the disk is rotated. The sample is filtered and mixed with a mixture of complementary oligonucleotides. These oligonucleotides are complementary to those to be analyzed and also have a thiol group at one end. Hybridization is allowed to proceed in the container denoted "Sample prep." Optionally, this container may be heated (not shown in Figure). After appropriate incubation, the disk is rotated. While the sample is transferred into the container denoted "Sample sep." it is mixed with a nuclease S solution delivered from a side capillary. The mixture is allowed to incubate in the "Sample sep." container which has two gold electrodes and a valve as has been illustrated in Fig. 8. The lower electrode is coated with spacers having isothiocyanate end groups. These bind to the thiol containing oligonucleotides several of which are hybridized with the sample. All unhybridized parts of DNA are digested and washed away. The battery then becomes operational. This is adjusted by the speed by which the acid and copper ions flow into the empty battery. The container heats up, the bound oligonucleotides are released and the valve is switched.

The oligonucleotides are flushed into the assay area. After suitable incubation the ligase arrives into the assay area and the two sidearms on the spacer molecule are connected, if the sample contains the proper oligonucleotide. The labile spacers are cut. If spacers contain siloxane groups the cutting is done by addition of fluoride ions. The loose gold spheres are washed away by rotating the IBCD at high speed. Reading may be performed immediately.

EXAMPLE 2Assay Element for the Detection of Cells and Viruses

Alternative embodiments of the assay element described elsewhere herein are useful for the detection of viral and bacterial particles, cells and other particles that are larger than the oligonucleotides, antibodies, antigens and the like that have been described previously. Viruses are typically nearly spherical particles having a diameter less than 0.5 μm . Bacteria are commonly either spherical or rod shaped. Their largest dimension is less than 2 μm excluding flagella and other similar external fibers. These pathogens are smaller or about the same size as the gold spheres used to detect them, and their interaction with two sidearms of the spacer may be limited. For this reason these sidearms are connected with the surface of the IBCD and the gold sphere instead of with the spacer as illustrated in Fig. 11. The gold sphere is attached to a spacer molecule 45 at one end of the spacer molecule and the other end of the spacer is attached to the surface of the substrate 46. The spacer molecule is provided with a typical cleavage site 47, for example a siloxane moiety, as has been previously described. In contrast to prior described embodiments where the side-arms are attached to the spacer molecule between the substrate and the cleavage site and the gold sphere and the cleavage site, side arms are attached to the gold sphere and to the surface of the substrate. For illustration purposes, in Fig. 11 oligonucleotides 48 and 49 are attached to the surface of the substrate and oligonucleotides 50 and 51 are attached to the surface of the gold sphere. Then complementary oligonucleotides are conjugated with members of a specific binding pair, designated as 52, 53, 54, and 55 are attached to the oligonucleotides on the substrate and the gold sphere as illustrated. This gives much more space for the cells to bind with the antibodies or other recognition molecules.

The spacers each still have at least one cleavage site. They are, in all respects identical to those described previously except that they have no attached sidearm molecules. When the cell for example arrives at the assay site, if it contains moieties that form specific binding pairs with their respective complementary members, a connective loop is formed between the gold sphere and the substrate. When the

spacer molecule is cleaved, the gold sphere is retained on the substrate and the presence of the cell may be detected as previously described. However, if no specific binding pairs are formed, upon cleavage of the spacer, the gold sphere does not remain attached to the substrate and is removed.

5 Antibodies or other recognition molecules may be attached to the substrate in a manner similar to that with which the spacers are attached. All spacers on the IBCD are identical and are attached at the same time to the amino groups or analogous active groups on the surface. About half of the amino groups are used for the attachment of the spacers. The other half is used to couple recognition molecules to the substrate. If
10 all recognition molecules on the surface of the IBCD are similar, they may be attached at the same time as spacers. Alternatively, if the recognition molecules are specific for each assay site, they may be dispensed locally by contact printing, ink-jet printing or microcapillary deposition.

 After the gold spheres are attached to the thiol groups in the spacers, the other
15 recognition molecules are attached, also via thiol groups, to the gold spheres. For this purpose these recognition molecules are first conjugated with a spacer containing a protected thiol or amino group. The amino group may be derivatized so that a thiol group is introduced. The various recognition molecules to be attached to the gold spheres are dispensed in a manner similar to that with which the other recognition
20 molecules were attached with the surface of the IBCD.

 The recognition molecules may be oligonucleotides. These oligonucleotides may be further hybridized with complementary oligonucleotide-biomolecule conjugates. This approach allows attachment of sensitive and reactive biomolecules, for example, proteins containing several amino or thiol groups.

25 The recognition molecules bound to the gold spheres are free to diffuse around the sphere although they are tightly bound. The cell that is recognized by both

recognition molecules completes a connective loop that binds the gold sphere to the surface of the IBCD. After cleaving the spacer, the gold sphere is retained and detected by the CD-ROM or DVD reader.

5 A multiplicity of different recognition molecules in the same assay site may be used. The advantage of this approach is that all known mutants of a certain pathogen species may be detected on one assay site. The various mutants also may be characterized on different assay sites containing specific recognition molecules.

10 The IBCD is a universal analyzer. It is easy to use and in its most advanced form it contains all reagents and only the sample is added. It can be used in clinical laboratories, hospitals, doctors' offices, and in the home. In home use the information can be loaded into a doctor's office *via* the internet. The IBCD can be designed so that the genetic signature of each patient is measured every time. About 35 polymorphism points are enough to give every person a unique "bar-code". This eliminates possible mistakes due to mixing of tubes or labels. Assays that can be performed include, but are not limited to immunoassays, DNA testing, cell counting and cell shape measurement, detection of cancerous cells in tissue samples, blood chemistry and electrolyte analysis. Other applications include mass screening of drug candidates, food and environmental safety analysis, and monitoring pathogens and toxins in a battlefield.

20

EXAMPLE 3

Turbidimetric assay of lipase activity.

The reagent cavity contains 15 μL of stabilized triolein (250 μM) emulsion that contains sodium deoxycholate (30 mM) and CaCl_2 (100 μM) at pH 9.0 in TRIS buffer (25 mM). The sample preparation chamber contains lyophilized porcine colipase (0.5 μg). Two microliters of serum is taken into the sample preparation chamber (using apparatus as shown in Fig. 17) together with stabilized triolein and

25

other reagents. Part of the mixture (5 μ L) is further transferred into a cuvette. Because the exit capillary goes toward the center of the disk, the counterpressure will prevent further flow. Absorbance at 340 nm is read at one minute intervals. The $\Delta A/\text{min}$ is a measure of lipase activity.

- 5 While this invention has been described with respect to some specific embodiments, it is understood that modifications thereto and equivalents and variations thereof will be apparent to one skilled in the art and are intended to be and are included within the scope of the claims appended hereto.

What is Claimed Is:



1. An optical disk, adapted to be read by an optical reader, comprising a first sector having a substantially self-contained assay means for binding or reacting an analyte suspected of being in a sample to at least one, predetermined location in the first sector and optionally a second sector containing a control means for conducting the assay and analyte location information with respect to one or more analytes suspected of being in a sample, accessible to a reader, and wherein the presence or absence of the analyte at said location is determinable by the reader using the control means and the location information.
2. The optical disk of Claim 1 which includes a sealable sample entry port in fluid communication with the assay means.
3. An apparatus for conducting an assay comprising an optical disk, a disk reader and an information processor, wherein the disk comprises a first sector having a substantially self-contained assay means for binding an analyte suspected of being in a sample to at least one, predetermined location in the first sector and optionally a second sector containing control information for conducting the assay and analyte location information with respect to one or more analytes suspected of being in the sample, accessible to the reader and processable by the information processor, wherein the disk is adapted to be read by the reader and the information processor is adapted to determine the presence or absence of the analyte at said location using the control information and the location information.
4. The apparatus of Claim 3 wherein the reader is a CD-ROM or a DVD reader and wherein the reader is adapted to be coupled to an information processor.
5. The apparatus of Claim 4 wherein the information processor is a personal computer.

6. The disk of Claim 1 wherein the assay means comprises a fluid storage means and a fluid transfer means formed in a disk surface.
7. The disk of Claim 6 wherein the fluid transfer means comprises a capillary duct.
- 5 8. The disk of Claim 7 wherein the fluid transfer means comprises a valve.
9. The disk of Claim 6 wherein the disk comprises an electrochemical energy means.
10. The disk of Claim 1 wherein the assay means comprises a sample port, a sample preparation sector, an analyte separation sector and an assay sector wherein the
10 analyte is localized.
11. The disk of Claim 6 wherein the fluid transfer means is responsive to centrifugal force or an electric field.
12. The disk of Claim 1 wherein the disk comprises a multiplicity of first sectors adapted to analyze for a multiplicity of analytes.
- 15 13. The disk of Claim 1 further comprising a multiplicity of first sectors adapted to analyze for the same analyte or different analytes wherein each of said multiplicity of sectors is adapted for fluid communication to a sample port.
14. An assay element comprising a substrate, a first oligonucleotide bound to the substrate, a spacer molecule bound at a first end to the first oligonucleotide by a
20 second oligonucleotide that is complementary to the first oligonucleotide, wherein the spacer molecule further comprises a means for binding to an analyte in a sample and having a second end that is detectable by a detection means, the spacer molecule further comprising a site intermediate the first and second ends that is cleavable, the binding means having a first moiety between the first end of the spacer molecule and

the cleavage site for binding to a first part of the analyte and a second moiety between the second end of the spacer molecule and the cleavage site for binding to a second part of the analyte.

15. An assay component, adapted to be read by a CD-ROM or a DVD reader
5 comprising an optical disk and a substantially self-contained assay means in the disk for binding an analyte suspected of being in a sample to at least one, predetermined location on the disk and means at said location for enabling detection of the absence or presence of the analyte by the CD-ROM or the DVD reader.

16. An optical disk, adapted to be read by a CD-ROM or a DVD reader
10 comprising a substantially self-contained assay means for localizing an analyte suspected of being in a sample to at least one, predetermined location on the disk and a means at said location for detecting the absence or presence of the analyte by the CD-ROM or the DVD reader.

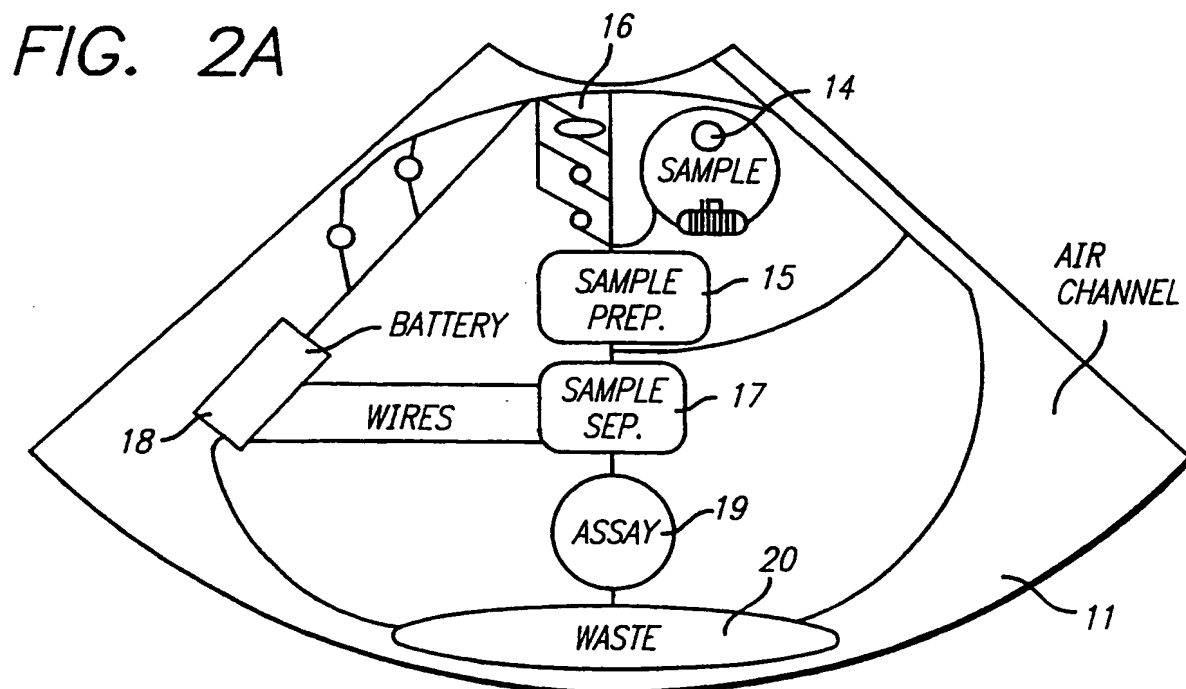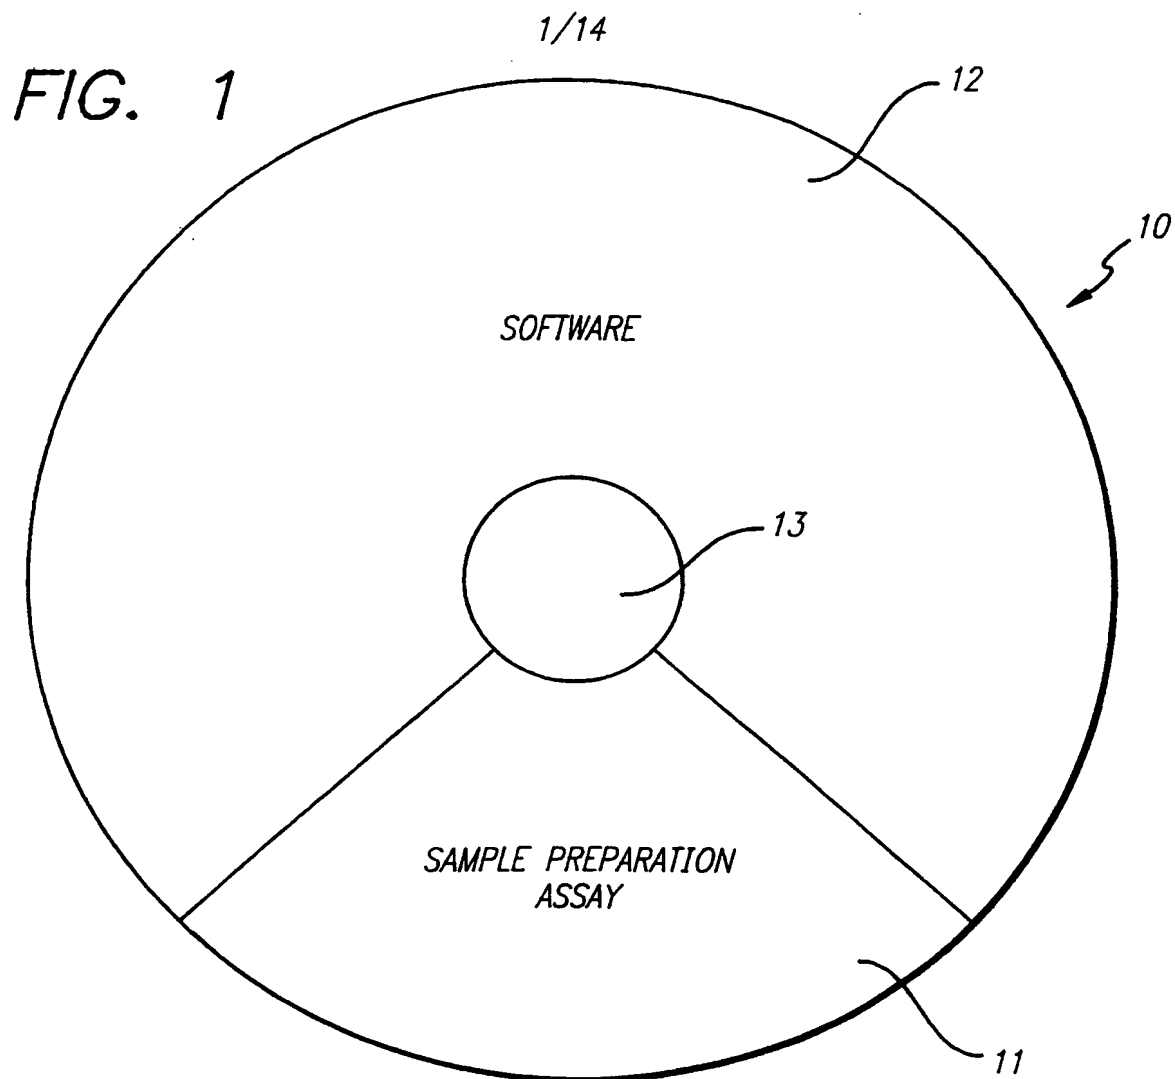

2/14

FIG. 2B


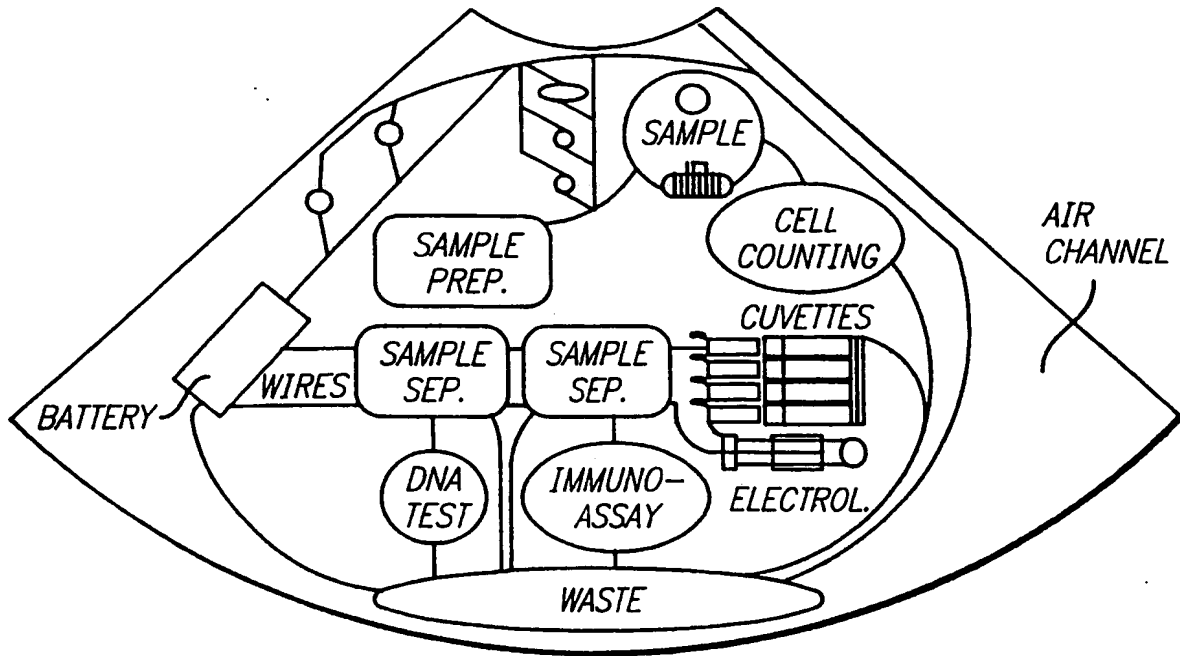


FIG. 3

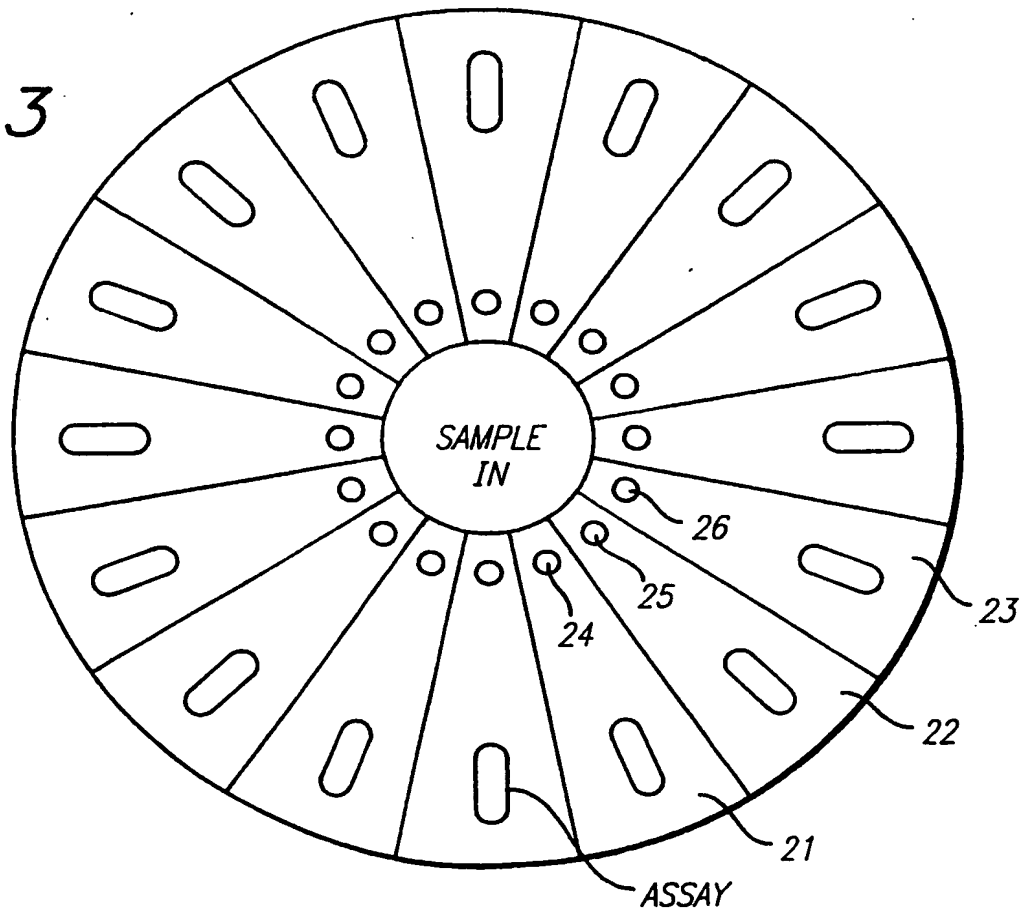

SUBSTITUTE SHEET (RULE 26)

3/14

FIG. 4


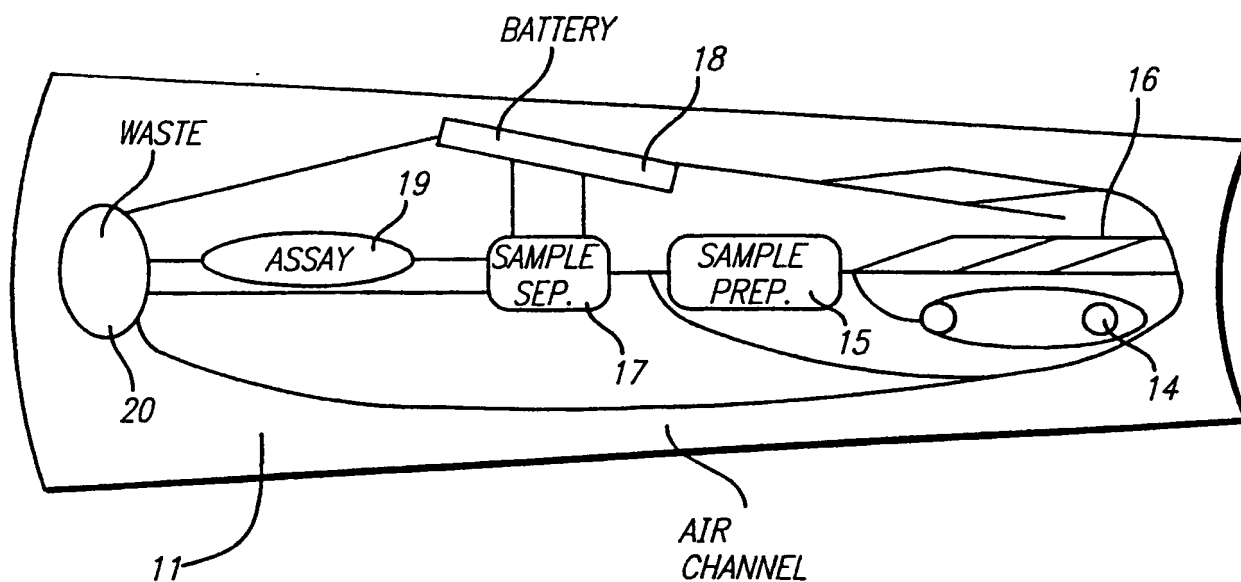


FIG. 5

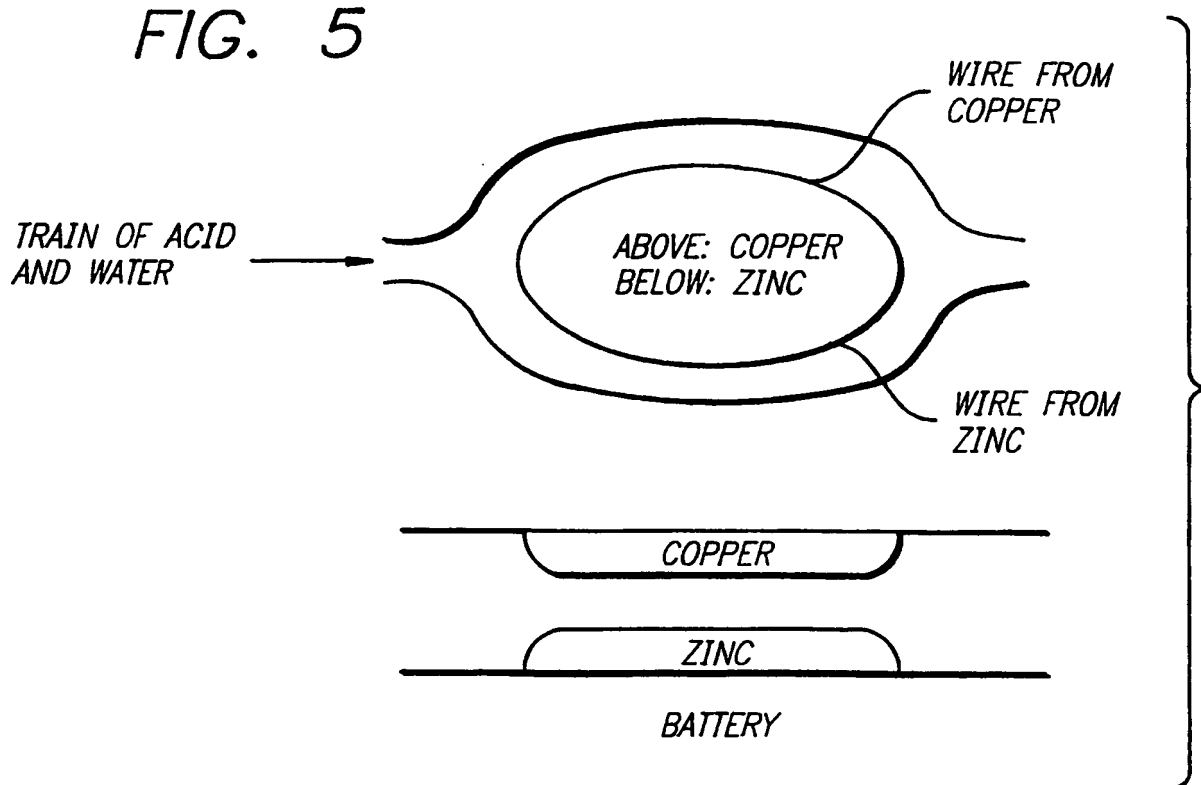

4/14

FIG. 6



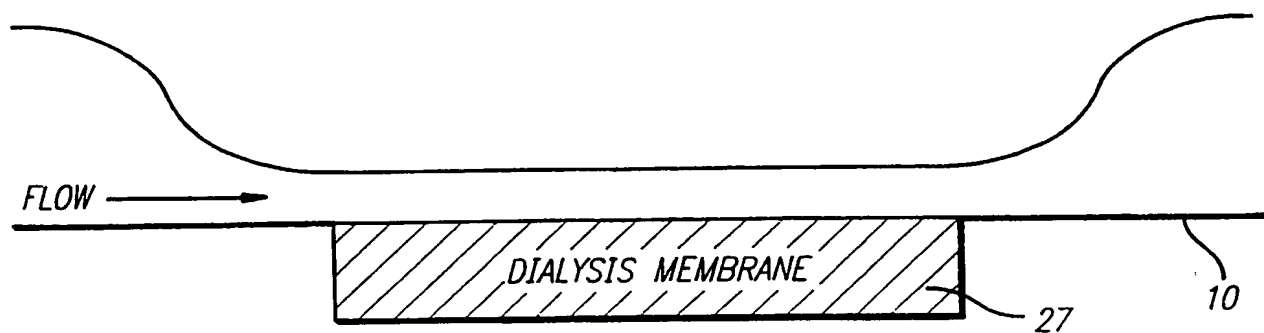


FIG. 7

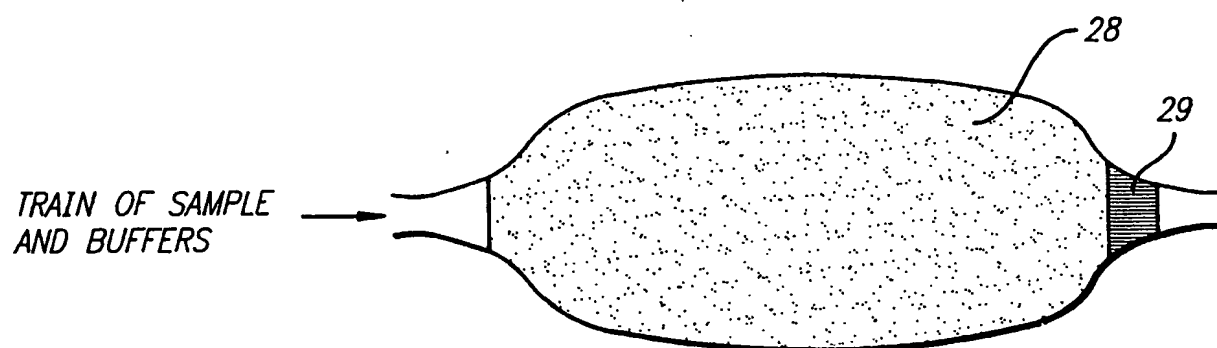

5/14

FIG. 8

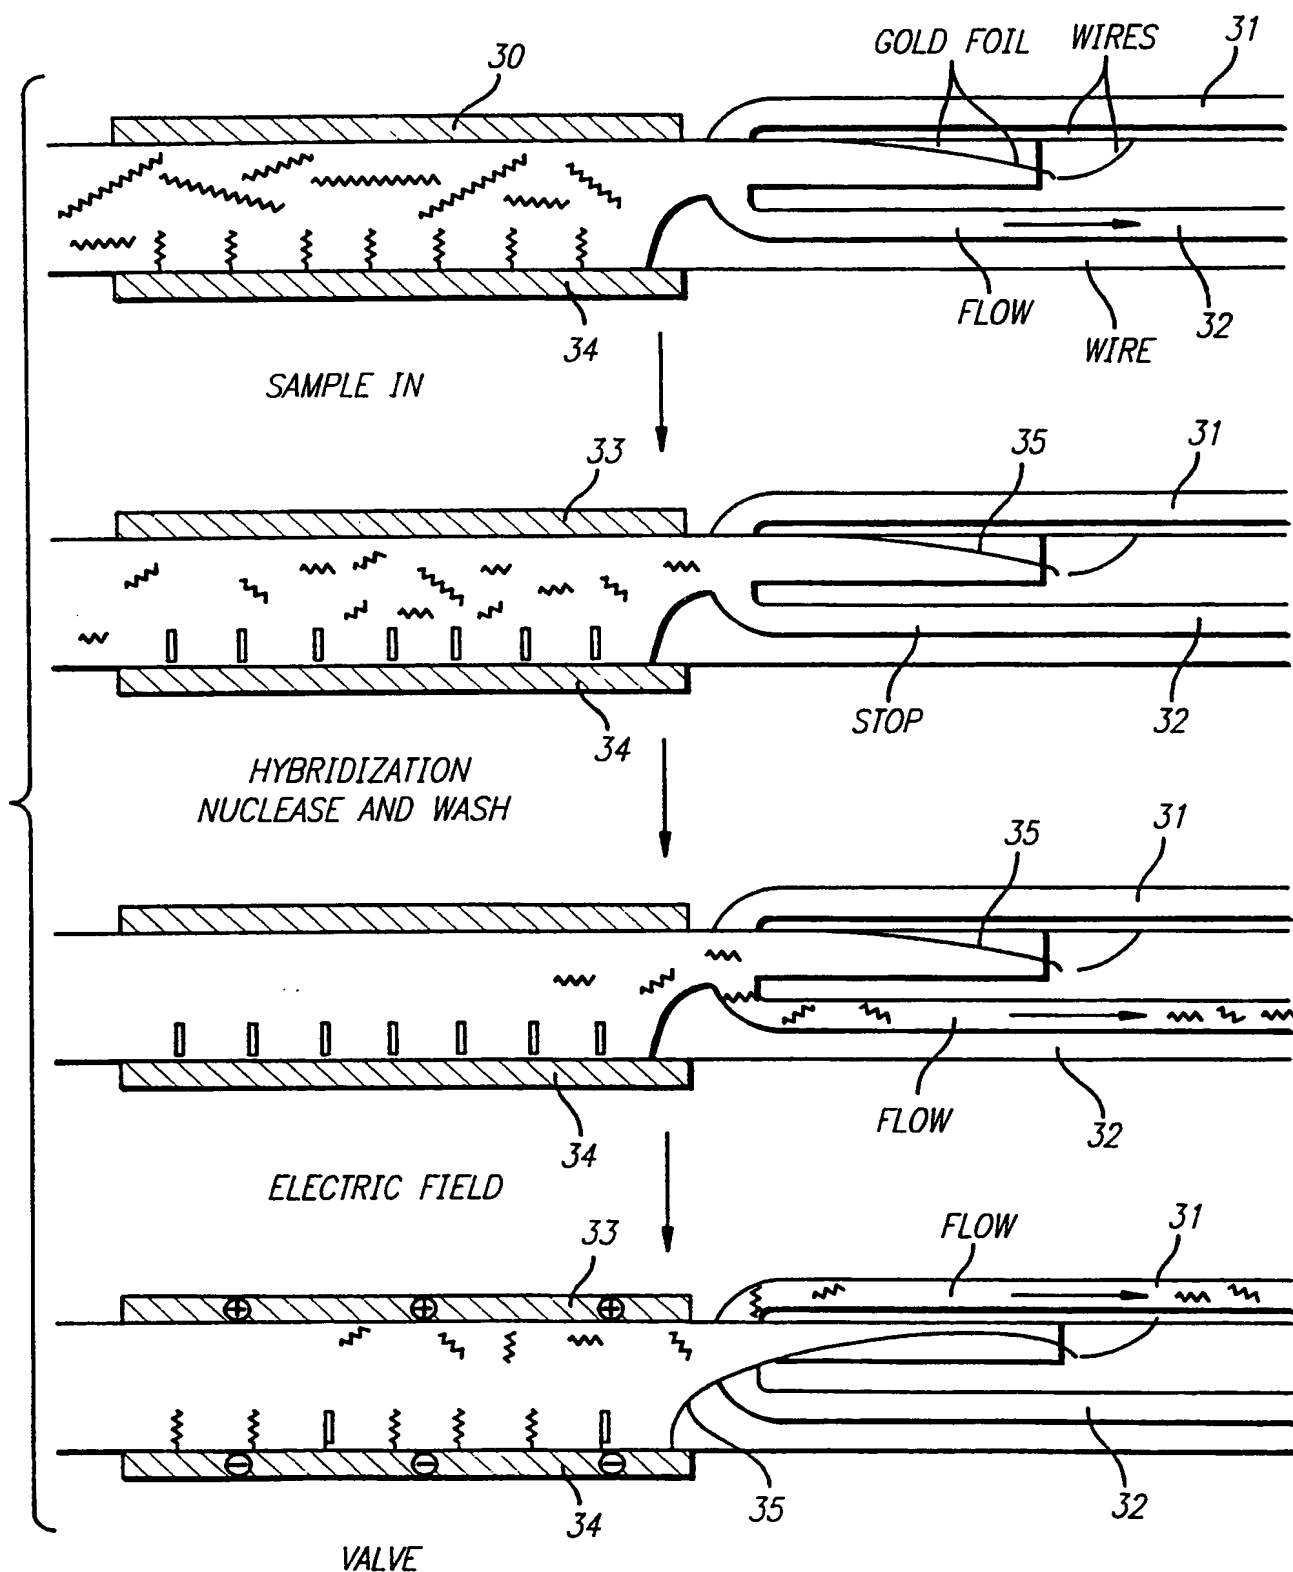

6/14


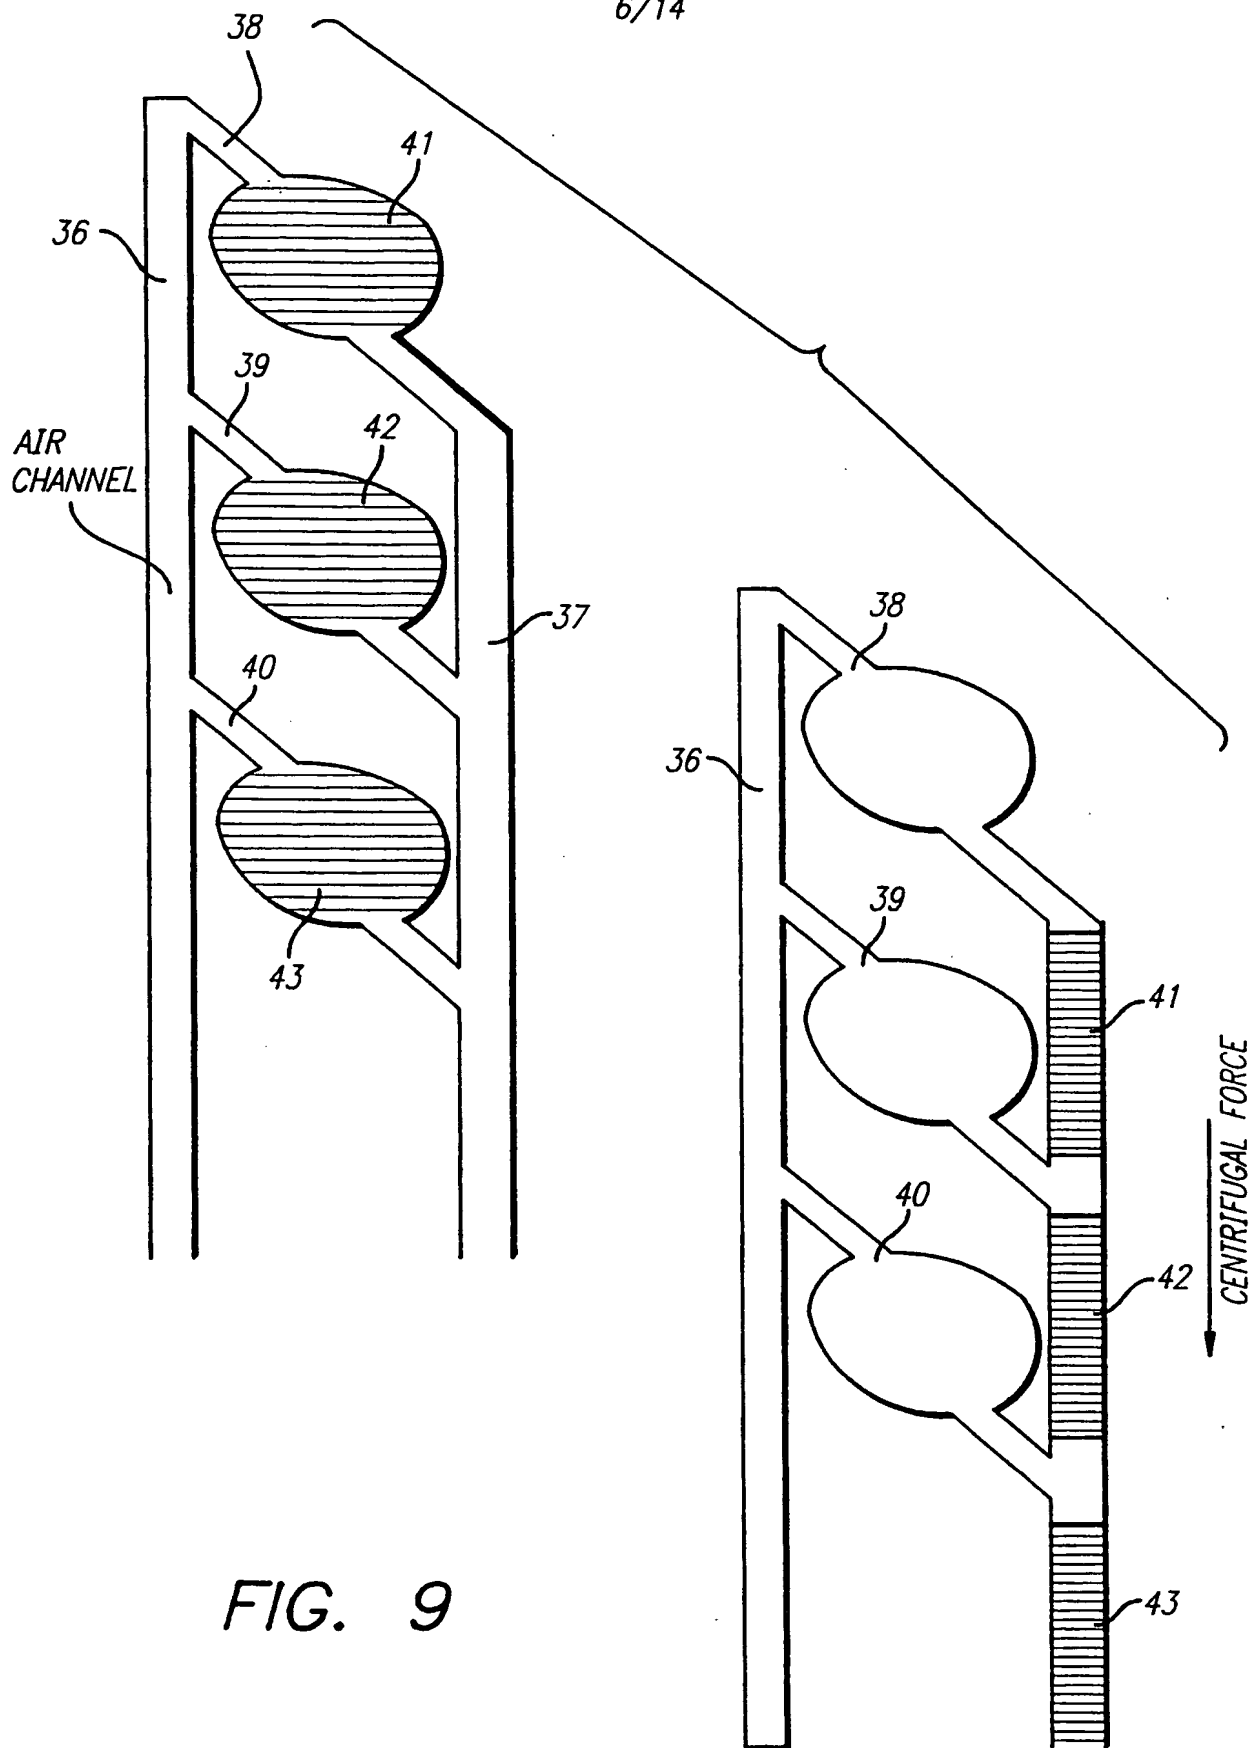


FIG. 9

7/14

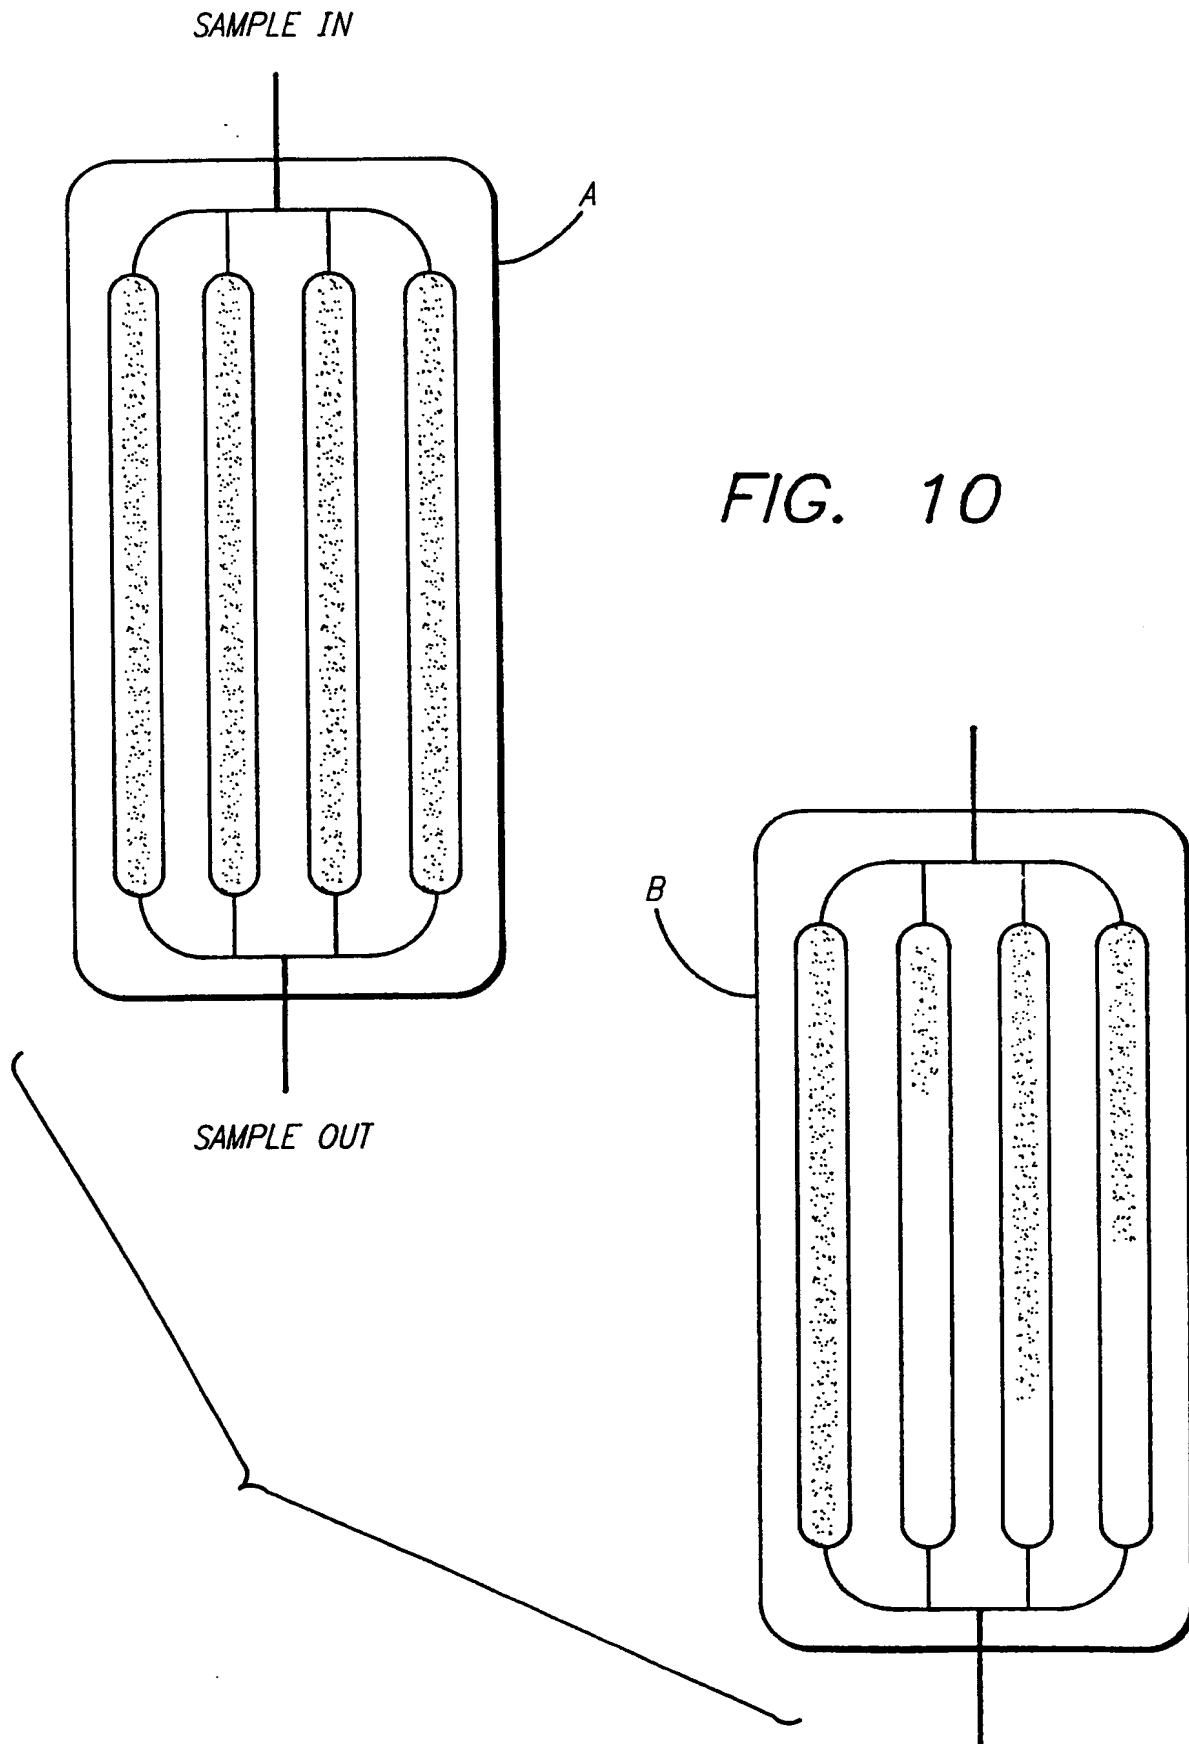

8/14

FIG. 11A

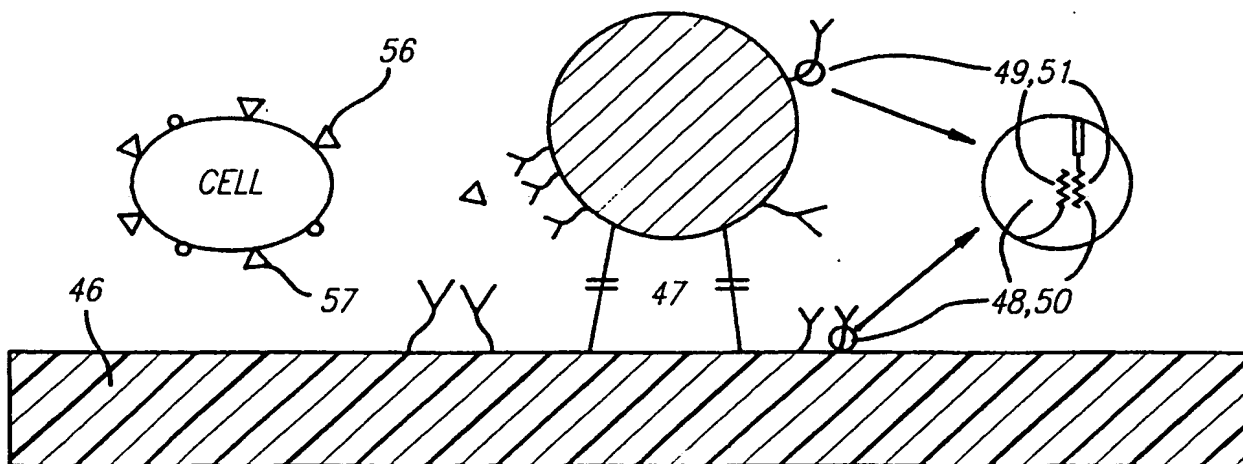


FIG. 11B


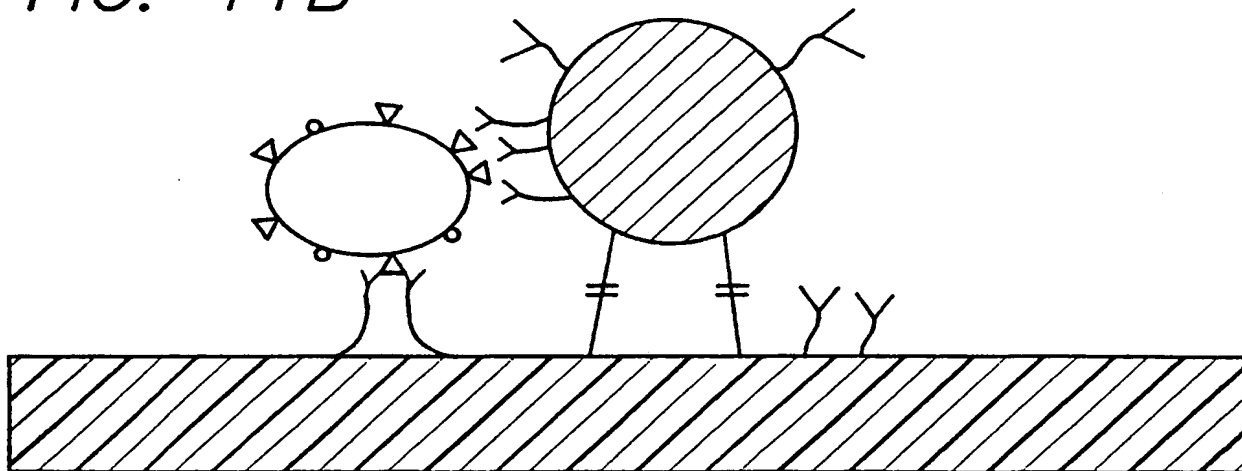


FIG. 11C

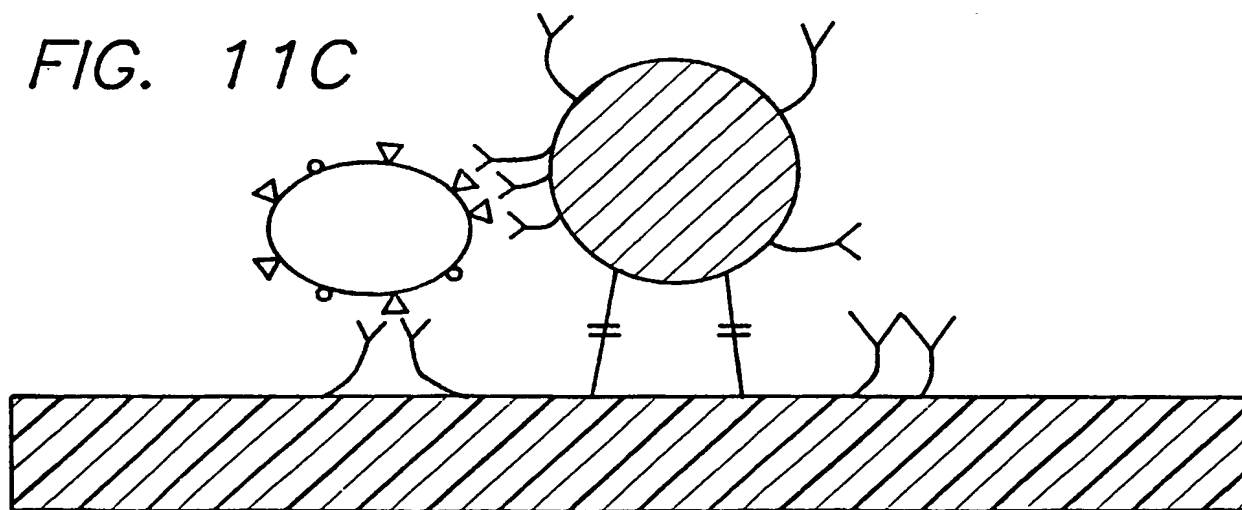

9/14

FIG. 12A

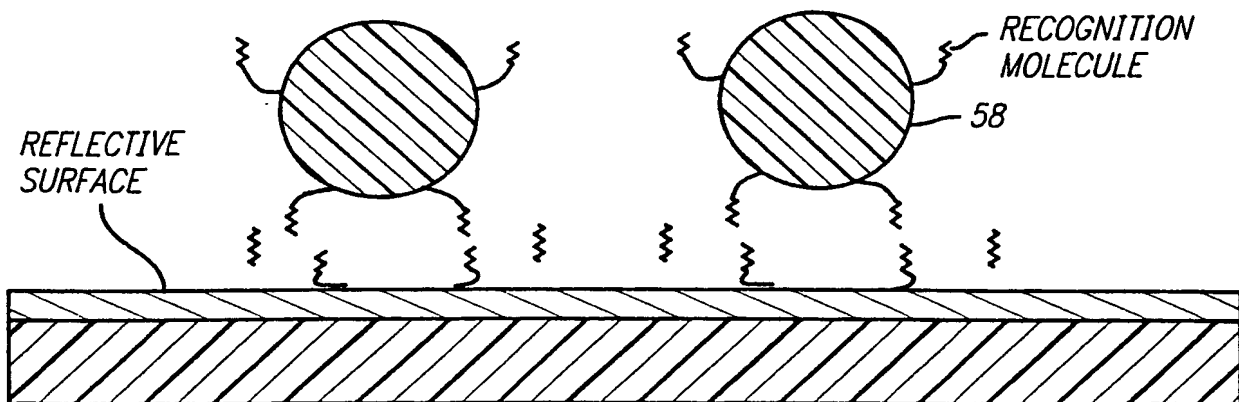


FIG. 12B



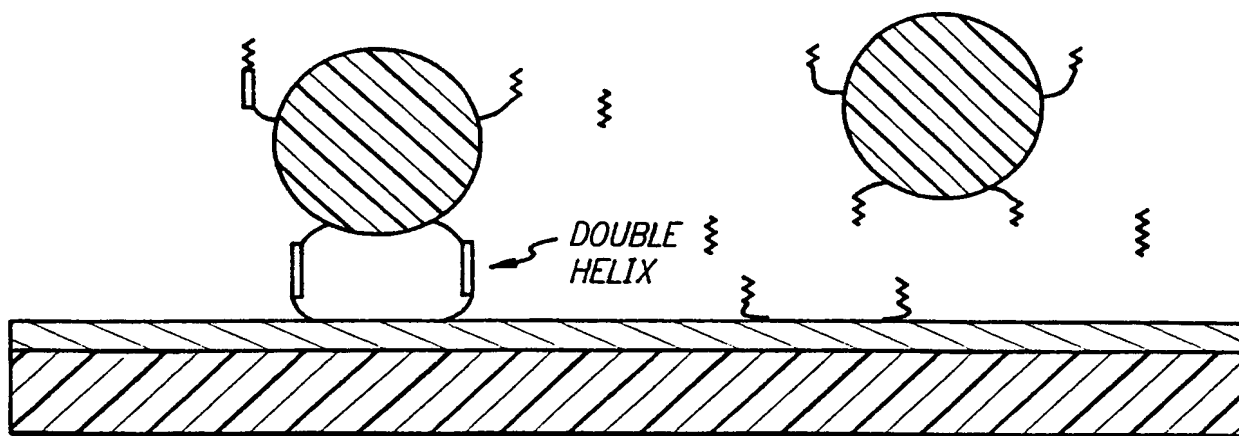


FIG. 12C

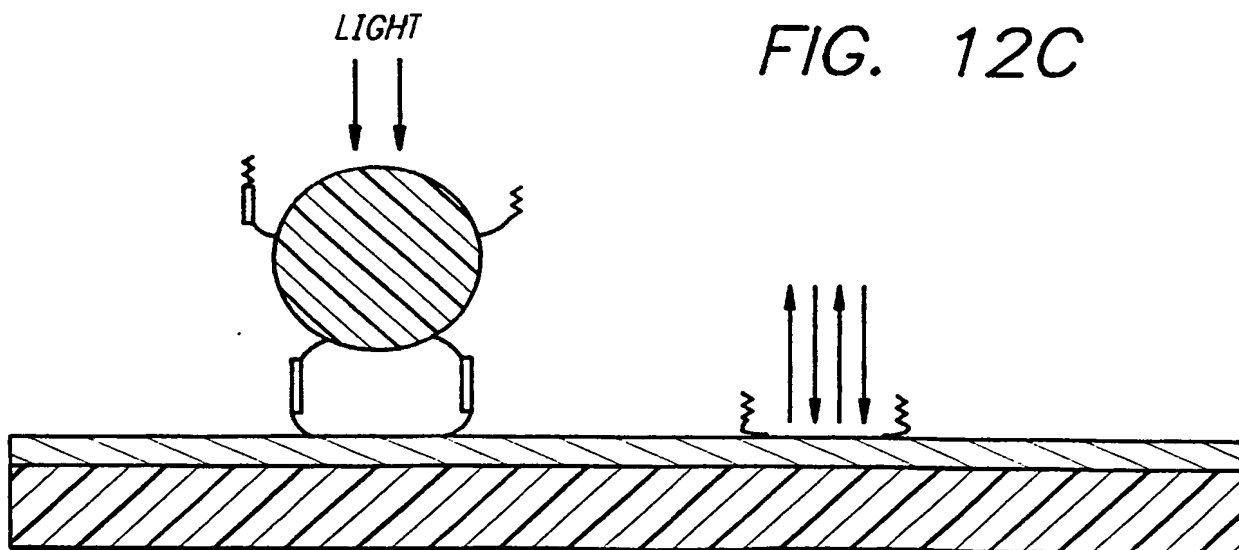

10/14

FIG. 13

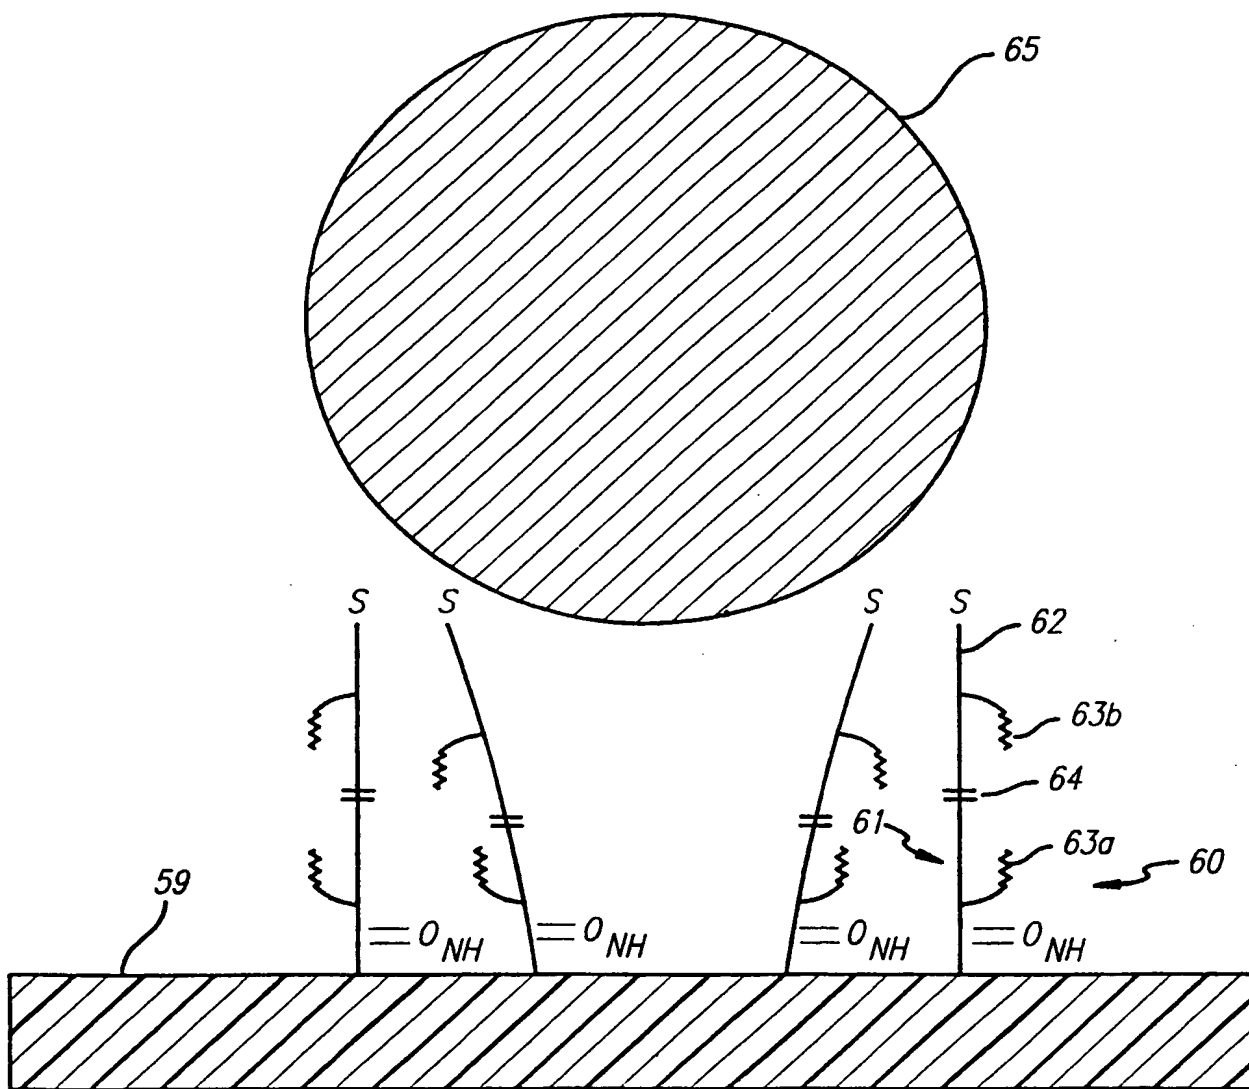

SUBSTITUTE SHEET (RULE 26)

11/14

FIG. 14a

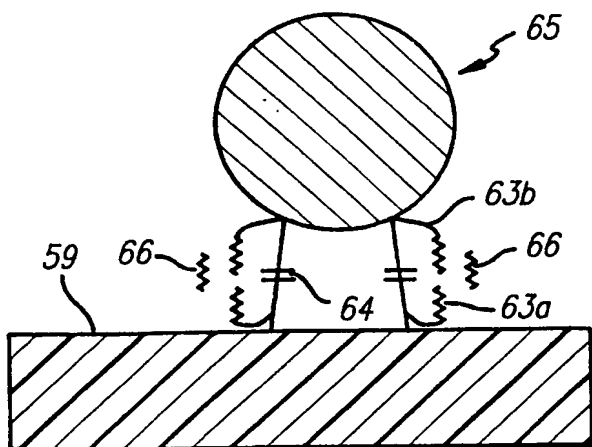


FIG. 14b

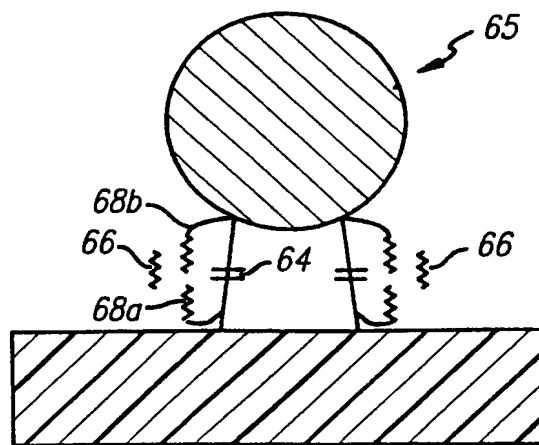


FIG. 14c

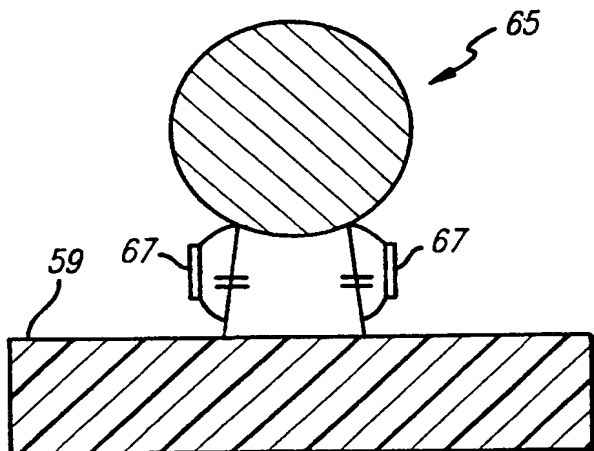


FIG. 14d

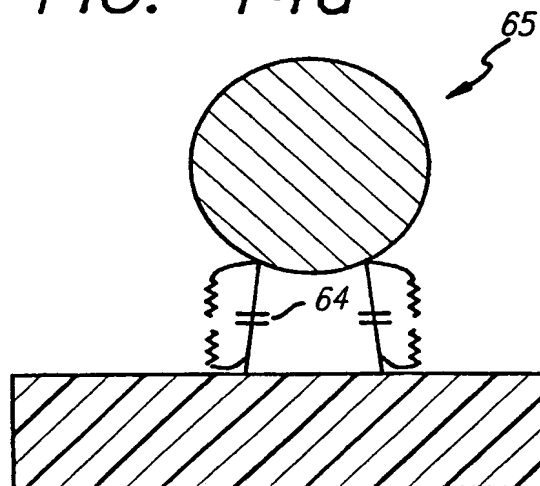


FIG. 14e


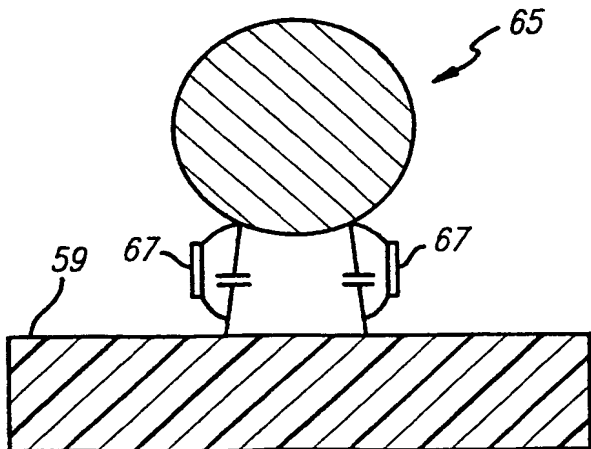


FIG. 14e

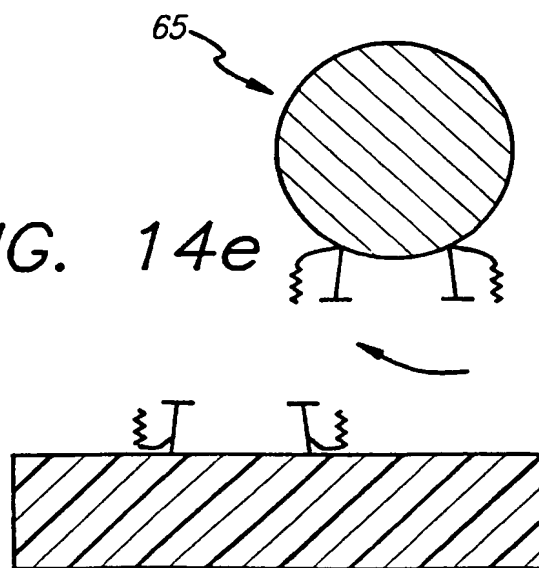

12/14

FIG. 15A


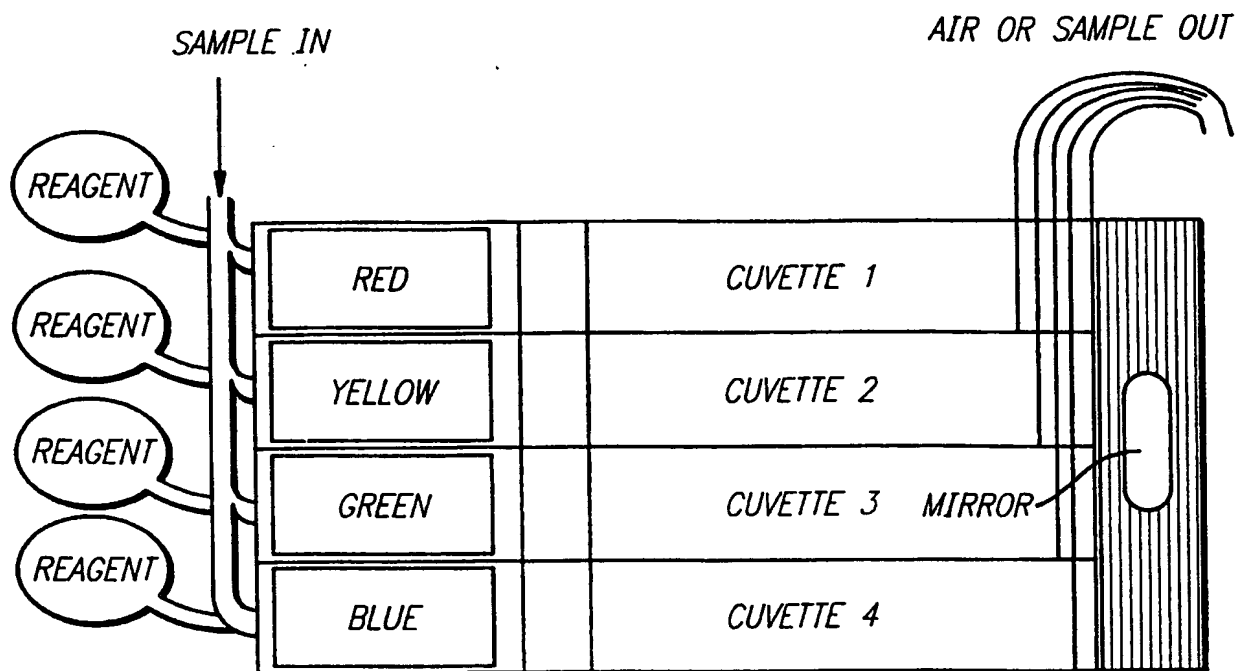


FIG. 15B

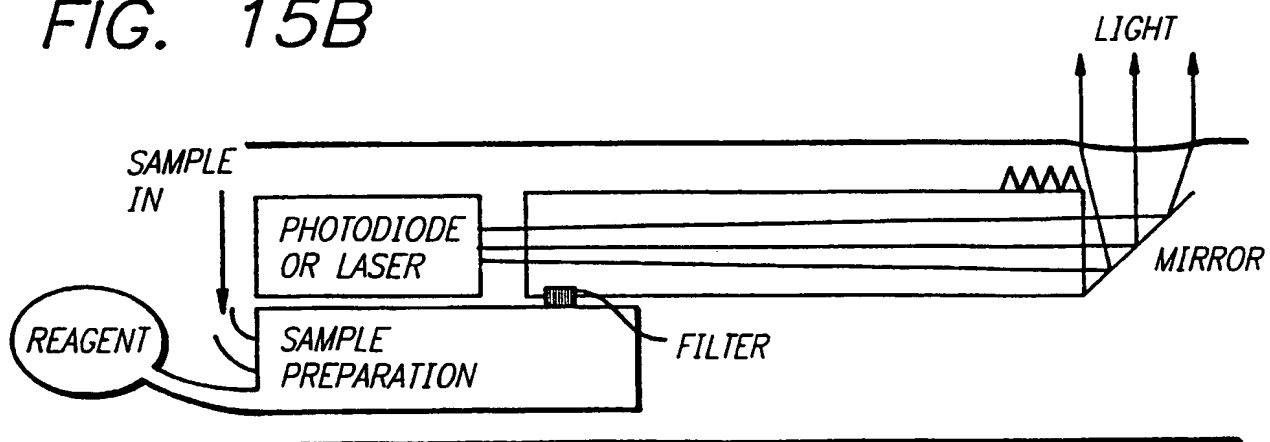


CUVETTE ASSEMBLY

SUBSTITUTE SHEET (RULE 26)


13/14

FIG. 16

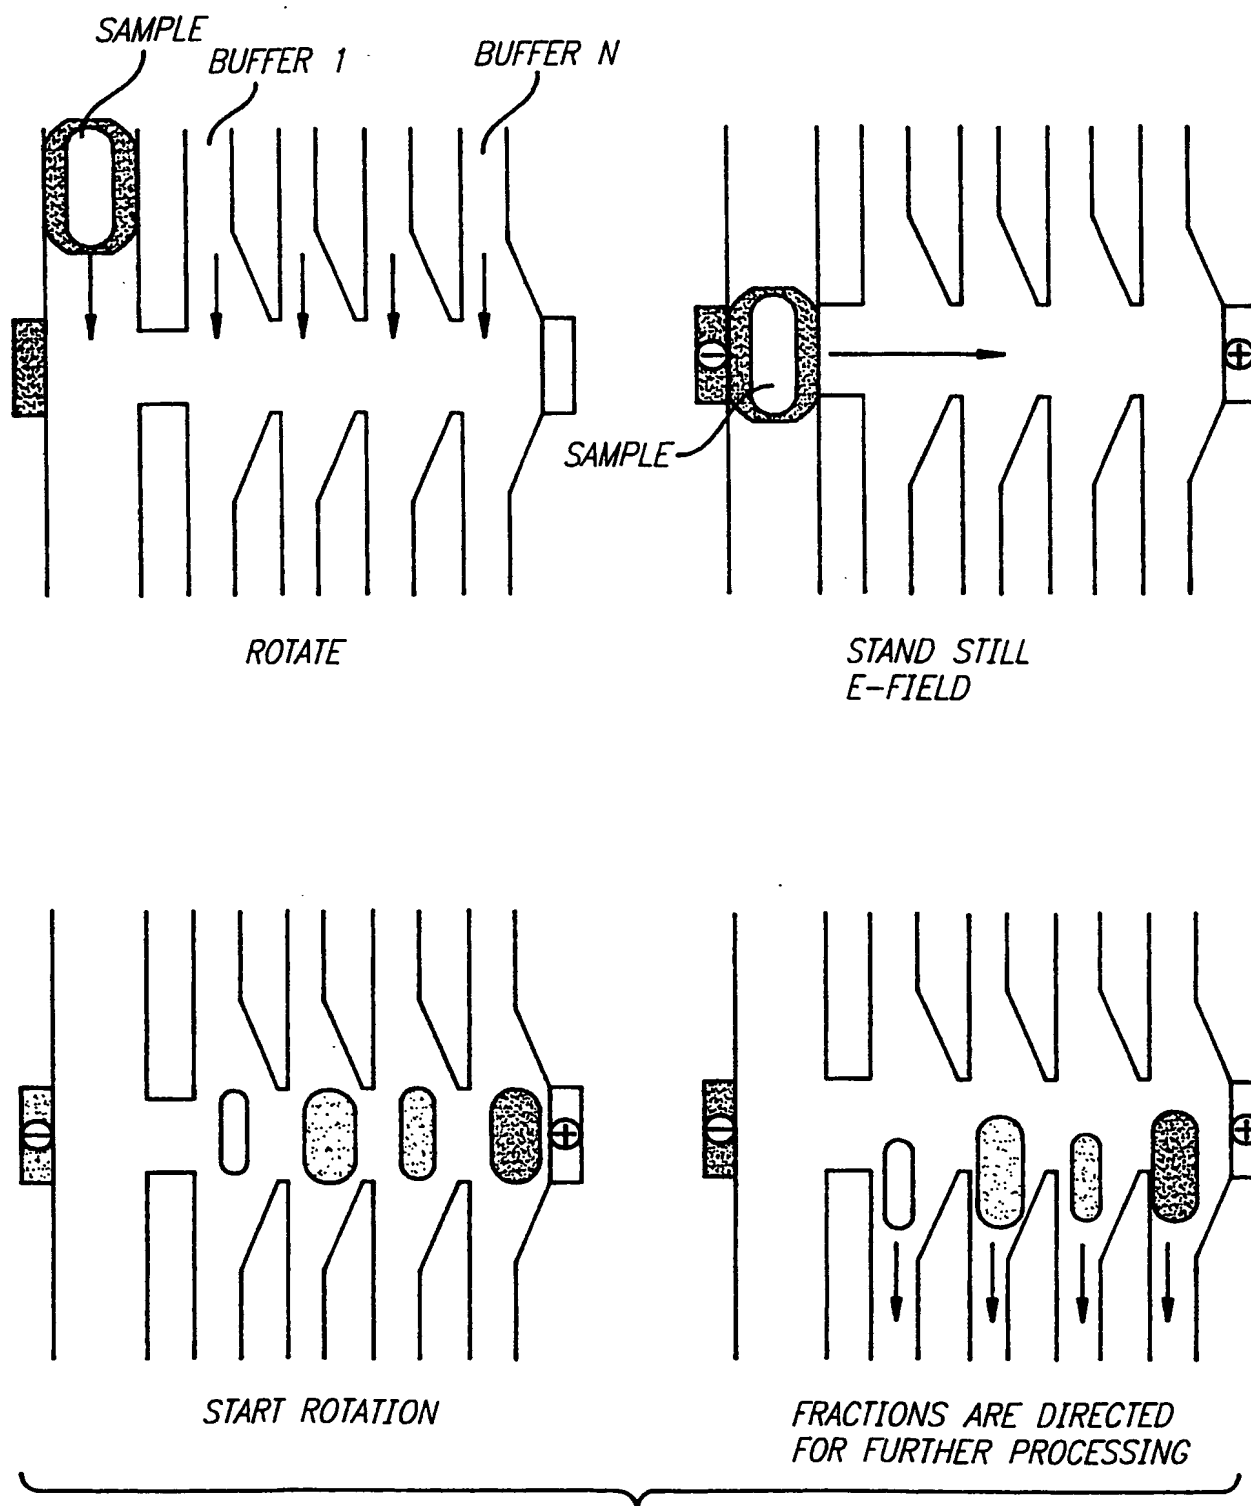

14/14

FIG. 17

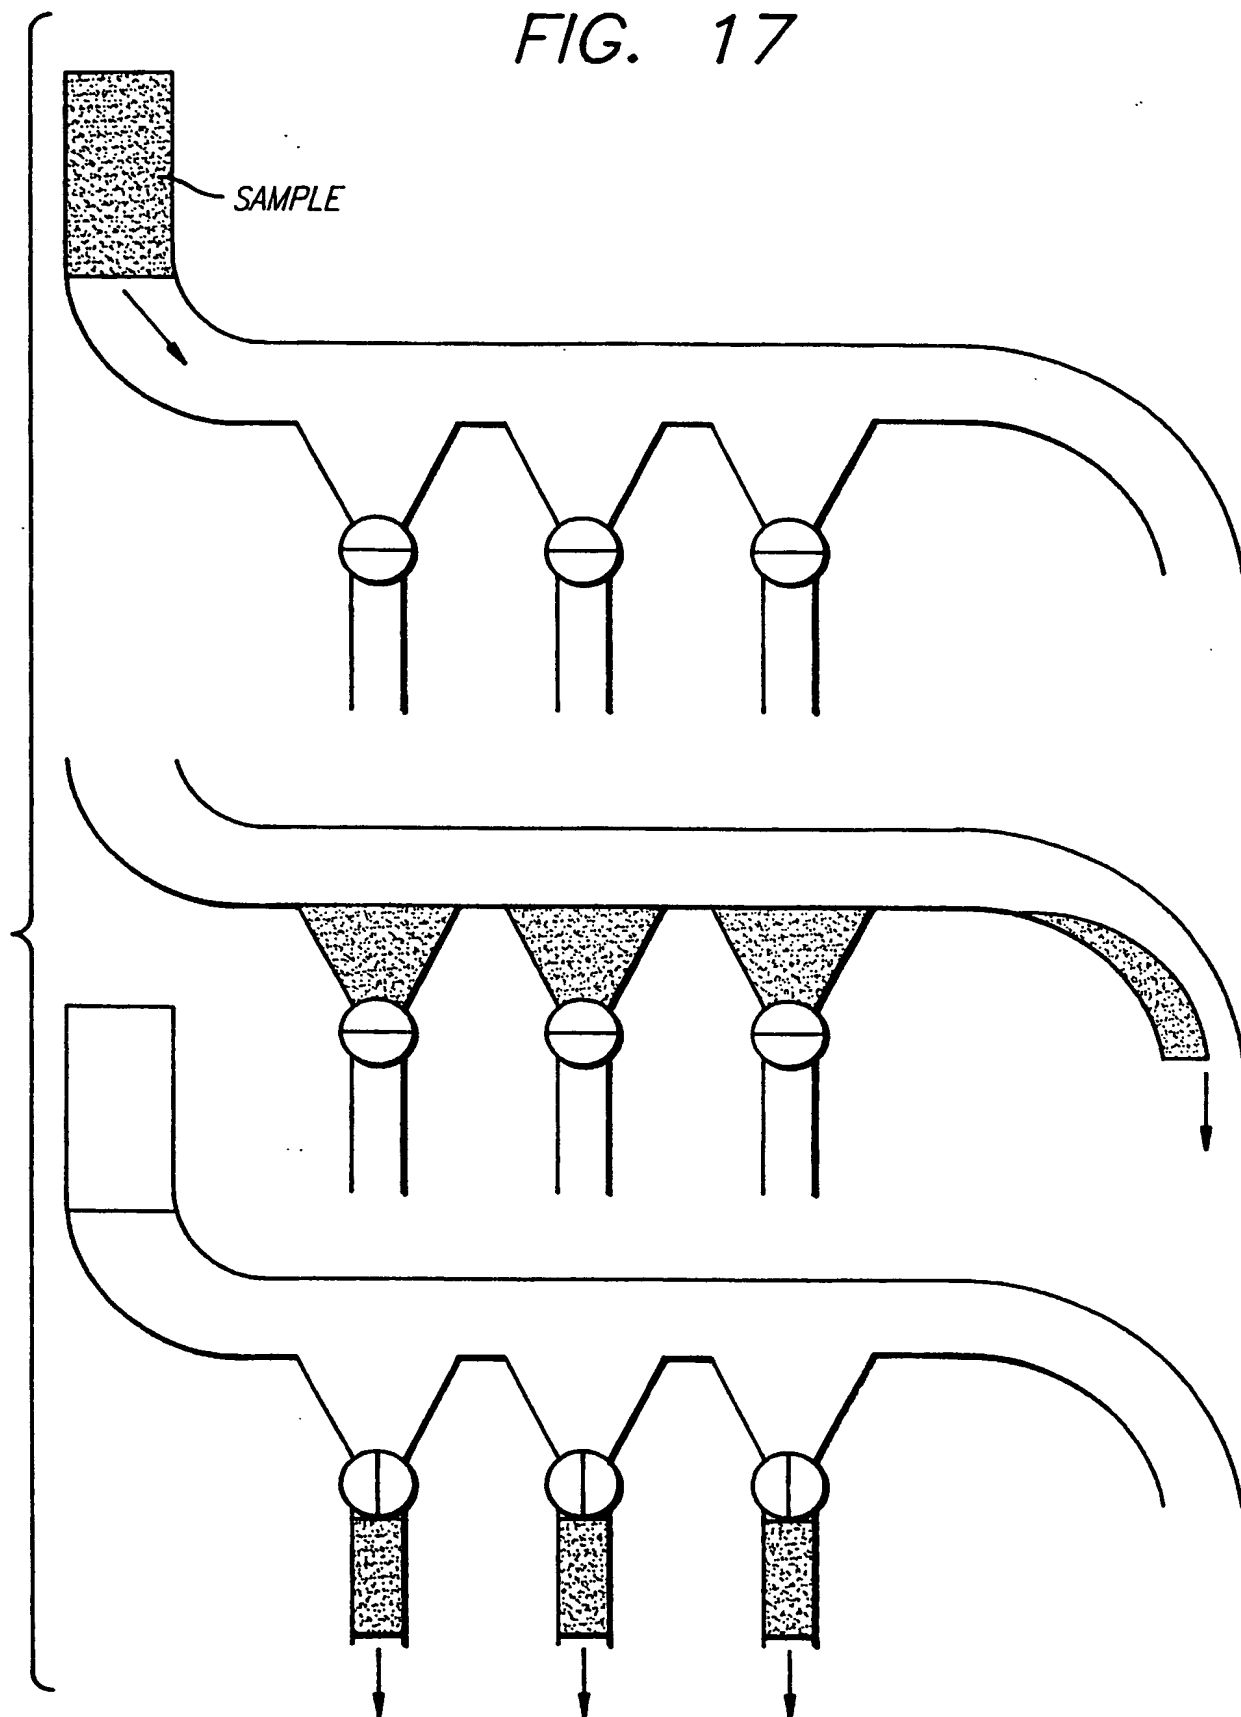


SUBSTITUTE SHEET (RULE 26)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01N 35/02, 33/487, 33/50, 21/64, 33/483 // C12Q 1/68		A3	(11) International Publication Number: WO 98/38510 (43) International Publication Date: 3 September 1998 (03.09.98)
(21) International Application Number: PCT/US98/04377 (22) International Filing Date: 27 February 1998 (27.02.98) (30) Priority Data: 60/039,419 28 February 1997 (28.02.97) US (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US 60/039,419 (CIP) Filed on 28 February 1997 (28.02.97)		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant (for all designated States except US): BURSTEIN LABORATORIES, INC. [US/US]; 33601 Avenida Calita, San Juan Capistrano, CA 92675 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): VIRTANEN, Jorma [US/US]; 5005 Paseo Segovia, Irvine, CA 92612 (US). (74) Agent: HALLUIN, Albert, P.; Howrey & Simon, 1299 Pennsylvania Avenue, N.W., Box 34, Washington, DC 20004-2402 (US).		(88) Date of publication of the international search report: 28 January 1999 (28.01.99)	

(54) Title: LABORATORY IN A DISK

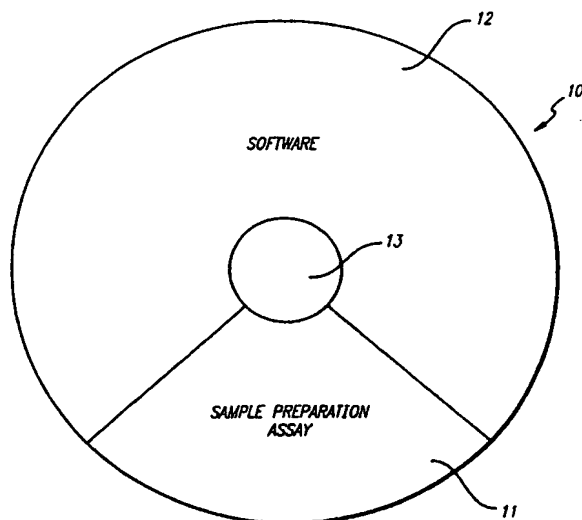

(57) Abstract

An apparatus is described that includes an optical disk, adapted to be read by an optical reader, comprising a first sector having substantially self-contained assay means for localizing an analyte suspected of being in a sample to at least one, predetermined location in the first sector and a second sector containing control means for conducting the assay and analyte location information, with respect to one or more analytes suspected of being in a sample, accessible to the reader, wherein the presence or absence of the analyte at said location is determinable by the reader using the control means and the location information. Depending on the nature of the assay, the disk will include fluid storage means, fluid transfer means, such as one or more capillary ducts, valves, batteries, dialyzers, columns, filters, sources of electric fields, wires or other electrical conductive means such as metallic surface deposits and the like.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/04377

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G01N35/02 G01N33/487 G01N33/50 G01N21/64 G01N33/483
//C12Q1/68

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G01N C12Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 96 09548 A (THE UNIVERSITY COURT OF THE UNIVERSITY OF GLASGOW) 28 March 1996	1,3-5, 12,15,16
Y	see page 10, line 16 - page 24, line 10; figures 1-7	6,7,10, 11,13
Y	EP 0 417 305 A (IDEMITSU PETROCHEMICAL CO. LTD.) 20 March 1991 see column 5, line 35 - column 15, line 13; figures 1-12	6,7,11, 13
Y	CAROL T. SCHEMBRI, ET AL.: "Portable Simultaneous Multiple Analyte Whole-Blood Analyzer for Point-of-Care Testing" CLINICAL CHEMISTRY., vol. 38, no. 9, September 1992, pages 1665-1670, XP000319980 WINSTON US see the whole document	10

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

22 September 1998

Date of mailing of the international search report

07.12.98

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Osborne, H

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/04377

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 35940 A (CIBA-GEIGY AG) 14 November 1996 see the whole document ----	1-16
A	WO 93 22053 A (TRUSTEES OF THE UNIVERSITY OF PENNSYLVANIA) 11 November 1993 see the whole document ----	1-16
P,Y	WO 98 01533 A (BURSTEIN LAB INC) 15 January 1998 see the whole document ----	14
A	EP 0 721 016 A (AFFYMAX TECH NV) 10 July 1996 see the whole document ----	14
A	WO 93 20092 A (ZENECA LTD ;MCLEAN MICHAEL JOSEPH (GB); HOLLAND DAVID (GB); GARMAN) 14 October 1993 see the whole document ----	14
Y	WO 96 32841 A (BURSTEIN LAB INC) 24 October 1996 see page 2, line 36 - page 3, line 8 see page 4, line 8 - line 12 see page 15, line 2 - line 36 see page 26, line 23 - page 28, line 6 ----	14
A	EP 0 707 076 A (AMOCO CORP) 17 April 1996 see figure 1B -----	14

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 98/ 04377

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see attached sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☒ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

The claims do not satisfy the requirements of unity of invention (Rule 13 PCT). The reasons are as follows:

The only concept in common of all the independent claims, being a biochemical assay, is well known in the art. See e.g. WO9322053 or EP417305.

1). The claims can be grouped according to their special technical features:

I. Claims 1- 13, 15,16, directed towards locating biochemical assays on an optical disk with CD- like characteristics. This solves problems of speed, automation and miniaturising of biochemical assays.

II. Claim 14, directed towards the biochemical constitution of an assay element, namely complementary oligonucleotides, connected by a cleavable spacer molecule, one of the oligonucleotides being connected to a substrate. This solves the problem of efficient regeneration of the assay element.

2). There is no feature in common to the groups, which could be considered as a special technical feature within the meaning of PCT Rule 13.2, second sentence. Biochemical assays as such, as mentioned before, are already well known in the art. Thus, no technical relationship within the meaning of PCT Rule 13, between the two groups of inventions, can be seen.

3). Consequently, it appears that claims 1- 16 do not satisfy the requirements of unity of invention within the meaning of PCT Rule 13.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. l. Application No

PCT/US 98/04377

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9609548 A	28-03-1996	AU 3481595 A	09-04-1996
		BR 9509021 A	30-12-1997
		CA 2200562 A	28-03-1996
		CN 1158659 A	03-09-1997
		EP 0782705 A	09-07-1997
		JP 10504397 T	28-04-1998
EP 417305 A	20-03-1991	JP 3225278 A	04-10-1991
		JP 1899235 C	27-01-1995
		JP 2232563 A	14-09-1990
		JP 6023767 B	30-03-1994
		JP 1889819 C	07-12-1994
		JP 2269969 A	05-11-1990
		JP 6019359 B	16-03-1994
		CA 2028829 A	08-09-1990
		WO 9010875 A	20-09-1990
WO 9635940 A	14-11-1996	AU 5763296 A	29-11-1996
		CA 2219769 A	14-11-1996
		EP 0824684 A	25-02-1998
		PL 323257 A	16-03-1998
WO 9322053 A	11-11-1993	US 5304487 A	19-04-1994
		US 5296375 A	22-03-1994
		AT 155711 T	15-08-1997
		AT 167816 T	15-07-1998
		AT 140025 T	15-07-1996
		AT 140880 T	15-08-1996
		AU 677780 B	08-05-1997
		AU 4222393 A	29-11-1993
		AU 680195 B	24-07-1997
		AU 4222593 A	29-11-1993
		AU 677781 B	08-05-1997
		AU 4222693 A	29-11-1993
		AU 4222793 A	29-11-1993
		AU 677197 B	17-04-1997
		AU 4223593 A	29-11-1993
		CA 2134474 A	11-11-1993
		CA 2134475 A	11-11-1993
		CA 2134476 A	11-11-1993

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. .tional Application No

PCT/US 98/04377

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9322053	A		CA 2134478 A	11-11-1993
			DE 69303483 D	08-08-1996
			DE 69303483 T	06-02-1997
			DE 69303898 D	05-09-1996
			DE 69303898 T	20-02-1997
			DE 69312483 D	04-09-1997
			DE 69312483 T	12-02-1998
			DE 69319427 D	06-08-1998
			EP 0637996 A	15-02-1995
			EP 0637997 A	15-02-1995
			EP 0639223 A	22-02-1995
			EP 0637998 A	15-02-1995
			EP 0637999 A	15-02-1995
			ES 2106341 T	01-11-1997
			GR 3025037 T	30-01-1998
			HK 16897 A	13-02-1997
			JP 7506430 T	13-07-1995
			JP 7506431 T	13-07-1995
			JP 7506256 T	13-07-1995
			JP 7506257 T	13-07-1995
			JP 7506258 T	13-07-1995
			WO 9322054 A	11-11-1993
			WO 9322421 A	11-11-1993
			WO 9322055 A	11-11-1993
			WO 9322058 A	11-11-1993
			US 5635358 A	03-06-1997
			US 5726026 A	10-03-1998
			US 5427946 A	27-06-1995
			US 5744366 A	28-04-1998
			US 5498392 A	12-03-1996
			US 5587128 A	24-12-1996
			US 5486335 A	23-01-1996
<hr/>				
WO 9801533	A	15-01-1998	AU 3958597 A	02-02-1998
<hr/>				
EP 0721016	A	10-07-1996	US 5556752 A	17-09-1996
			US 5770722 A	23-06-1998
<hr/>				
WO 9320092	A	14-10-1993	AT 148129 T	15-02-1997
			AU 4042493 A	08-11-1993

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/04377

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9320092 A		CA 2131994 A	14-10-1993
		DE 69307689 D	06-03-1997
		DE 69307689 T	15-05-1997
		EP 0633891 A	18-01-1995
		FI 944568 A	30-09-1994
		JP 7505290 T	15-06-1995
		NO 943660 A	30-09-1994
		US 5393877 A	28-02-1995
		US 5552535 A	03-09-1996
WO 9632841 A	24-10-1996	US 5718915 A	17-02-1998
		AU 5555496 A	07-11-1996
		CA 2218691 A	24-10-1996
EP 0707076 A	17-04-1996	DE 68926484 D	20-06-1996
		DE 68926484 T	05-12-1996
		EP 0361983 A	04-04-1990
		JP 2257898 A	18-10-1990
		US 5763171 A	09-06-1998
		US 5472840 A	05-12-1995

THIS PAGE BLANK (USPTO)